

Steering Wheel Removal

10-3

1962-63 ALFA ROMEO

Giulietta (1962-63)

HORN BUTTON

Disconnect battery positive lead. Using suitable tool (6121.06.007), remove horn button lock ring. Unscrew three screws attaching horn ring. Lift out spring and contact plate.


STEERING WHEEL

After removing horn button and horn ring, withdraw pressure caps from wires. Pull wires out of steering column from steering

box end. Remove rubber seals from their seats. Remove steering wheel nut and install suitable puller (6121.12.090). Remove steering wheel and Woodruff key.

TURN SIGNAL & DIMMER SWITCHES

With steering wheel removed, unscrew three lock nuts attaching cable clamps. Remove screw holding switches to bracket. Lift out switches.

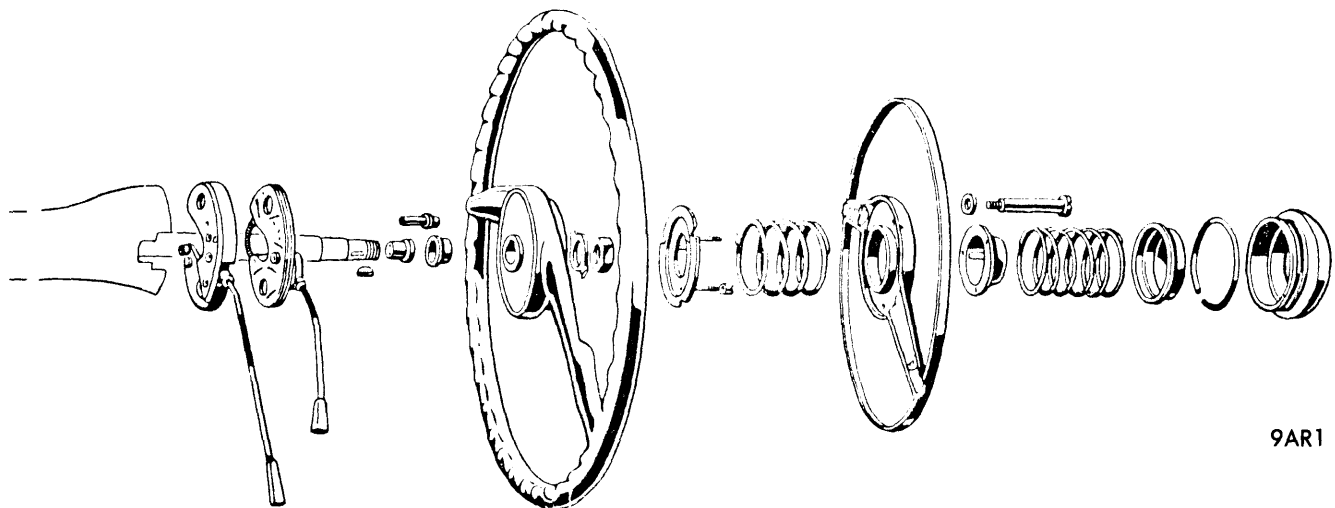

STEERING WHEEL ASSEMBLY

1970-72 AUDI S90 & 100LS


Audi S90 (1970-72)

Audi 100LS (1970-72)

STEERING WHEEL & HORN BUTTON

S90 – Pry off horn bar. Unscrew steering wheel nut and remove contact ring (unscrew outer Phillips-head screws only). Disconnect horn wire from ring. To install, reverse removal procedure.

100LS – Detach horn bar. Disconnect horn wire and unscrew steering wheel nut. Set front wheels in straight-ahead position before reinstalling steering wheel.

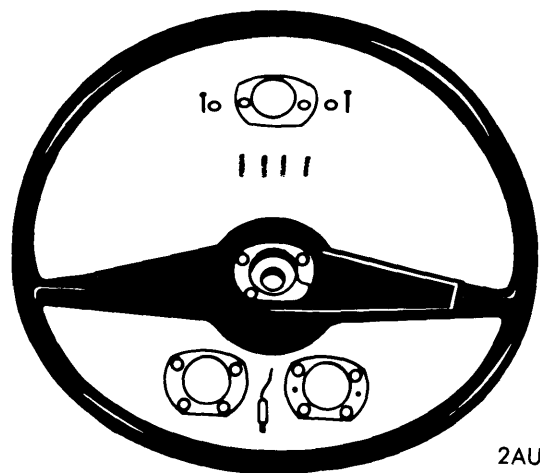

STEERING WHEEL COMPONENTS