


MERCEDES-BENZ

230
240D
280
450SE
450SEL
450SL
450SLC

HORN PAD & STEERING WHEEL

Removal – Grip horn pad near one corner and pull straight up until free, then pull up other corner, and remove pad from steering wheel. Unscrew steering wheel retaining nut, remove spring washer, and pull steering wheel from shaft.

Installation – Prior to steering wheel installation, ensure scribe mark on shaft is straight up. Position wheel on shaft with spokes horizontal. Install retaining nut (with spring washer) and tighten to 36 ft. lbs. (5 mkg).

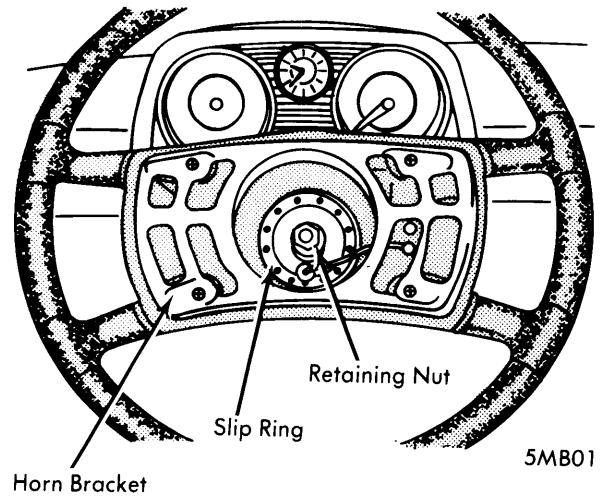

STEERING WHEEL REMOVAL

MG


MGB
MGB/GT
Midget

HORN BUTTON & STEERING WHEEL

All Models – Remove steering wheel horn button (pry off). Remove the horn contact plunger. Bend back the lock ring tabs, unscrew the retaining bolts, remove the lock ring, then lift off the steering wheel. To install, reverse removal procedure.

STEERING WHEEL HUB

All Models – Screw on steering wheel nut a few turns, then attach a suitable hub puller (18G 1181). Mark hub and column to assure correct replacement. Pull hub until it is loose on shaft. Remove puller tool, steering wheel nut, and lift off steering wheel hub. Note reference of marks during replacement.

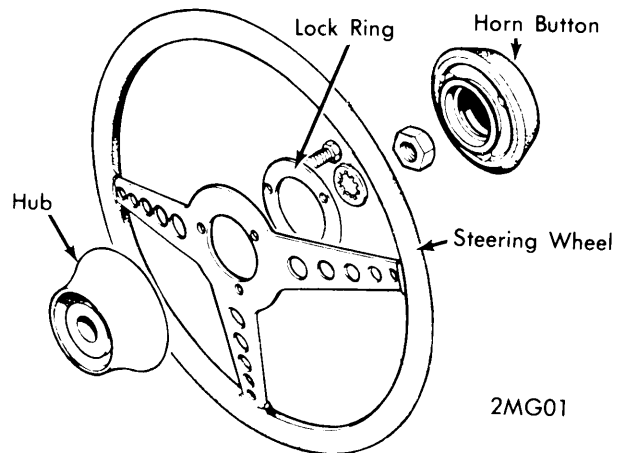

MG STEERING WHEEL & COMPONENTS