

10-18 Steering Wheel & Column Switches

TOYOTA (Cont.)

2) Fit key cylinder so ignition switch and cylinder will be aligned in "ACC" position. Insert into housing and check for proper locking operation and key movement.

3) Replace all other components (combination switch assembly, bearing retainer, steering wheel) as removed. Check for proper turn signal switch cancelling operation and smoothness of steering wheel movement.

TRIUMPH

TR7
Spitfire

REMOVAL & INSTALLATION

HORN CONTROL, STEERING WHEEL & HUB

Removal – 1) Disconnect battery ground. On Spitfire models, use a flat, blunt, instrument to pry off steering wheel pad. Remove horn button. On TR7 models, remove 3 screws from underside of steering wheel that secure steering wheel to pad.

2) On all models, place front wheels in a straight-ahead position and remove steering wheel attaching nut and washer. Index mark hub and steering mast with a scribe line to ensure proper reinstallation.

3) Using suitable steering wheel removal tool, pull off wheel and hub assembly. Hub can be further disassembled from steering wheel on Spitfire by removing the six attaching bolts.

Installation – Place steering wheel in alignment with index mark on hub and refit remaining components in reverse order.

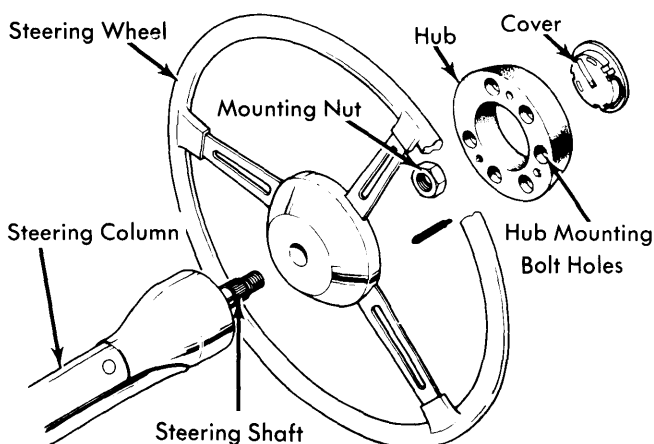


Fig. 1 Spitfire Steering Wheel Components
TR7 Similar

TURN SIGNAL & WIPER SWITCHES

Removal – 1) Disconnect battery. Unscrew retaining screws for column cover halves and remove covers. Remove steering wheel as previously described.

2) Note the location of all wiring harnesses. Remove the wire harness clip securing the switch harnesses. Disconnect the two harness plugs. Loosen the switch clamp screw and remove switch assembly.

3) Individual switches may be replaced at this time, but note that the two center cross-head screws are not to be removed. Switches are separated by drilling out the two retaining rivets and removing the one cross-head screw (on right side of switch face).

Installation – To install, reverse removal procedure.

IGNITION SWITCH AND STEERING COLUMN LOCK

NOTE – On Spitfire models, steering column must be removed. On TR7 models, plastic cover around steering shaft has to come off.

Removal – On Spitfire only, remove nuts and washers securing steering lock shroud and withdraw shroud and column support. On all models, center punch both shear bolts mounting steering lock to column. Using a small chisel or suitable tool arrangement, remove bolts. Disconnect electrical plug and remove steering lock.

Installation – To install ignition switch and steering column lock, reverse removal procedure and note the following: Ensure dowel pin aligns in column drilling. Fit new shear head bolts and tighten evenly.