

CHRYSLER CORP (Cont.)

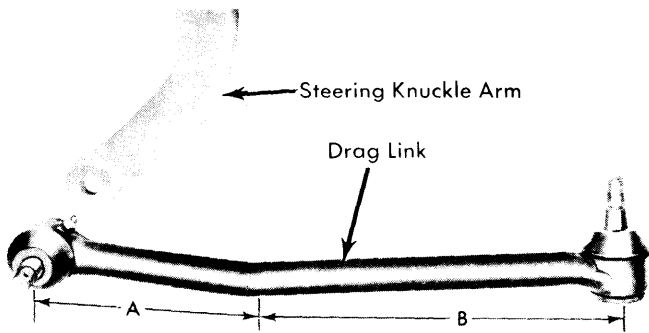


Fig. 5 Correctly Installing Drag Link for "W", "AW" and "PW" Models.

Drag Link – Drag link must be installed to steering knuckle arm with short half ("A") attaching to knuckle arm.

MOTOR HOME CHASSIS ("M" MODELS)

Servicing Components – Front axle assembly may be divided into four subassemblies: "I" beam axle, steering knuckles, steering linkage, and brake assemblies. It is not necessary to remove complete assembly to service steering linkage.

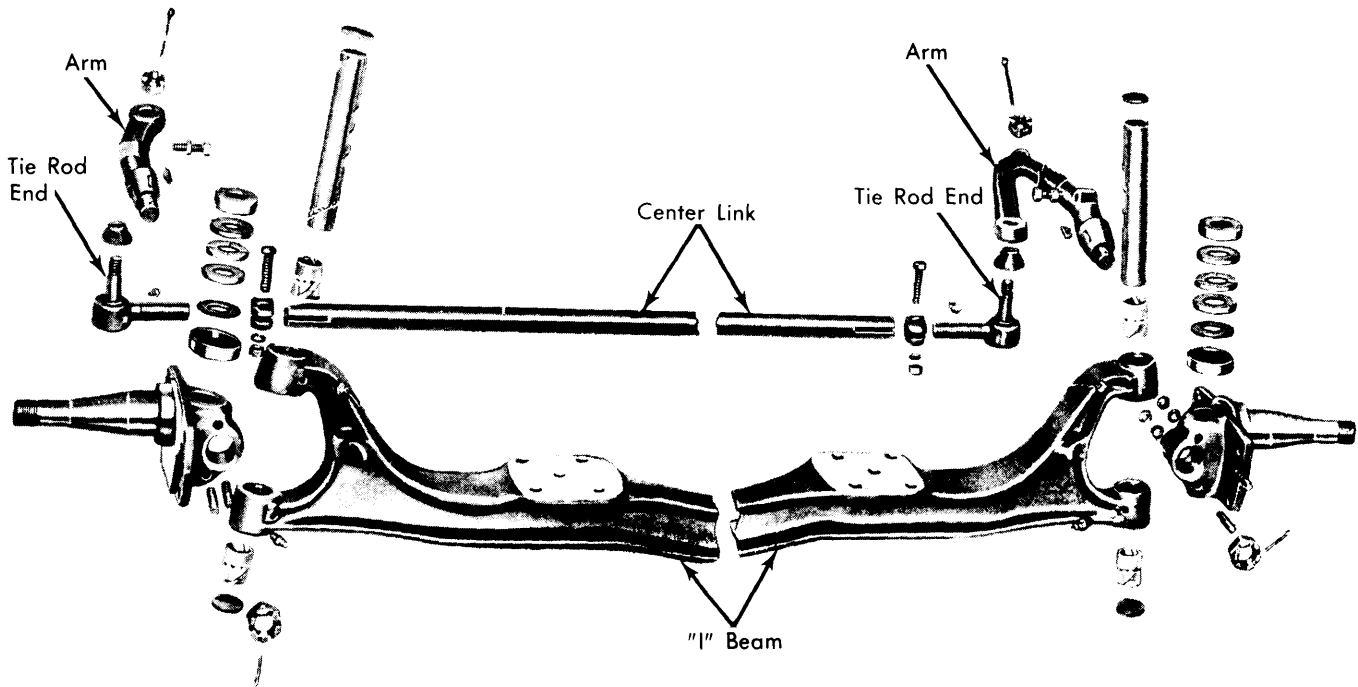


Fig. 6 Disassembled View of Motor Home Chassis Steering Linkage (Linkage for Elliot Type Axle Shown)

FORD MOTOR CO.

ALL MODELS

Tie Rod & Link Replacement – 1) Replace drag link or connecting rods if ball studs are excessively loose, components are bent or threads are stripped. Never try to straighten drag link or connecting rods.

2) Remove cotter pins and nuts from drag link ball studs and from right connecting rod ball stud. Remove right connecting

rod ball stud from drag link. Remove connecting rod ball studs from steering arm and pitman arm.

3) Remove cotter pin and nut from left connecting rod. Remove ball stud from steering arm. Loosen clamp bolts on adjustment sleeve. Unscrew left and right connecting rods from adjustment sleeve.

Steering Linkage

FORD MOTOR CO. (Cont.)

4) Lubricate threads of new connecting rods. Screw into adjusting sleeve approximately same distance as old connecting rods. Make sure of correct position of adjusting sleeve clamps. See Fig. 2.

5) Install drag link in position. Tighten nuts and install cotter pins. Install connecting rods and adjusting sleeve in position. Tighten nuts and install cotter pins. Check vehicle toe-in and adjust as necessary.

TIGHTENING SPECIFICATIONS

Application	Ft. Lbs.
Steering Gear-to-Frame	65
Pitman Arm-to-Steering Gear	170-230
Drag Link Studs (E100-E350)	50-75
Spindle Connecting Rod Studs	60-70
Rod Clamps	
F100-250	35-45
F350	40-60
"E" Models	29-41

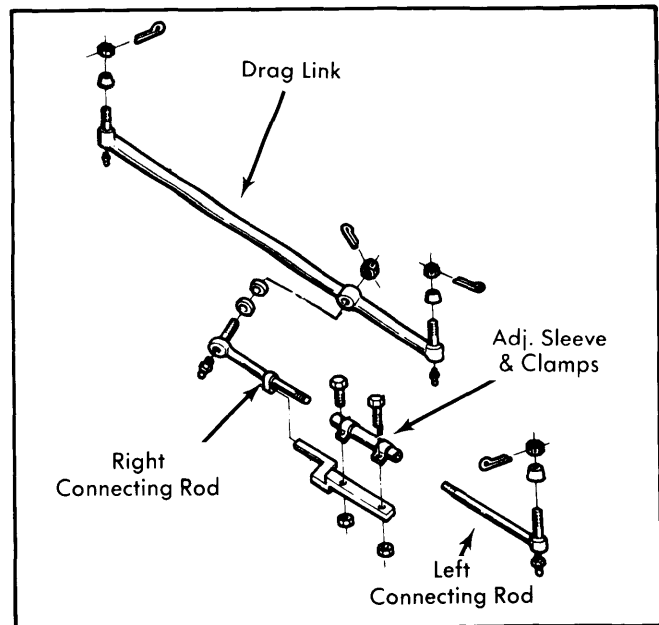


Fig. 1 Disassembled View of Steering Linkage

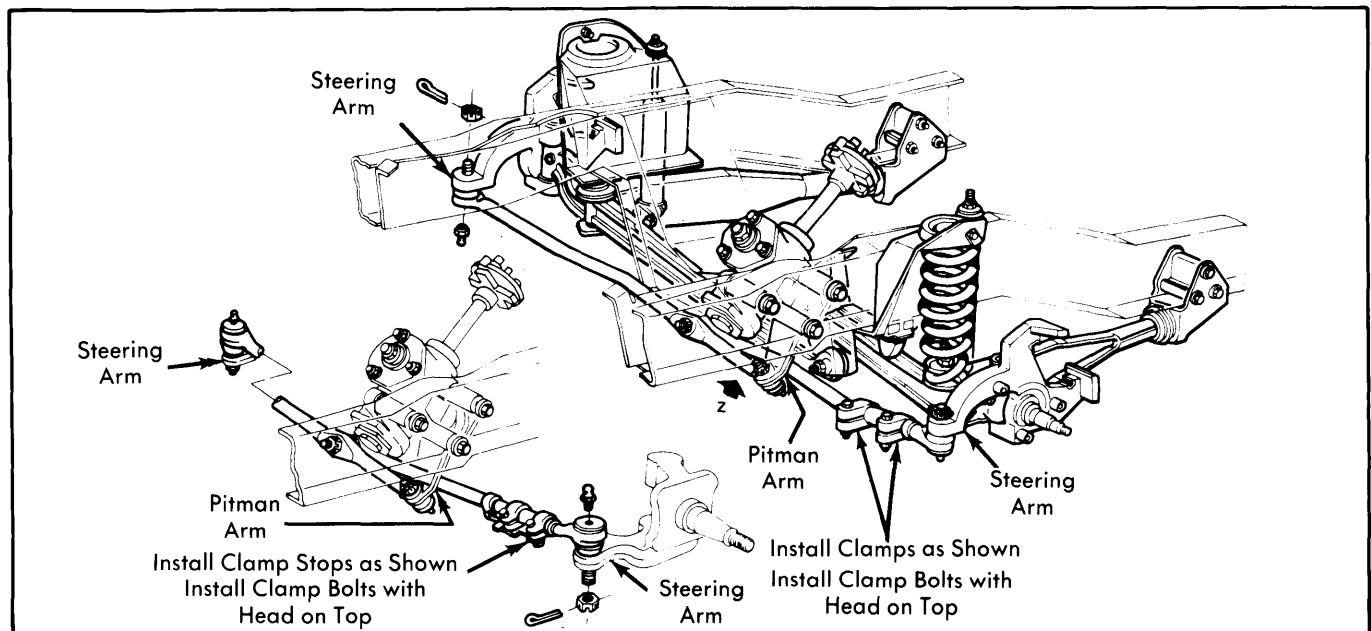


Fig. 2 Steering Linkage All Models

GENERAL MOTORS

ALL MODELS

Steering System Service Precautions — All steering component fasteners are made of special quality materials. Replacement fasteners must be of same part number or equivalent. Torque all fasteners to specification and install new cotter pins. When installing cotter pins, do not back off castellated nuts to align cotter pin hole, tighten nut to next slot

that lines up with hole. Do not hammer on ball studs or damage to threads may result. If threads are not clean and smooth, ball studs may turn in joint when nuts are tightened. Sleeve clamps must always be positioned as specified before tightening bolts.

ALL MODELS

Tie Rod Removal — 1) Raise vehicle and remove tie rod fasteners. Remove outer ball stud by tapping on steering arm

GENERAL MOTORS (Cont.)

at tie rod end with a light hammer while using a heavy hammer as a backing. Remove inner ball stud from relay rod using same procedure.

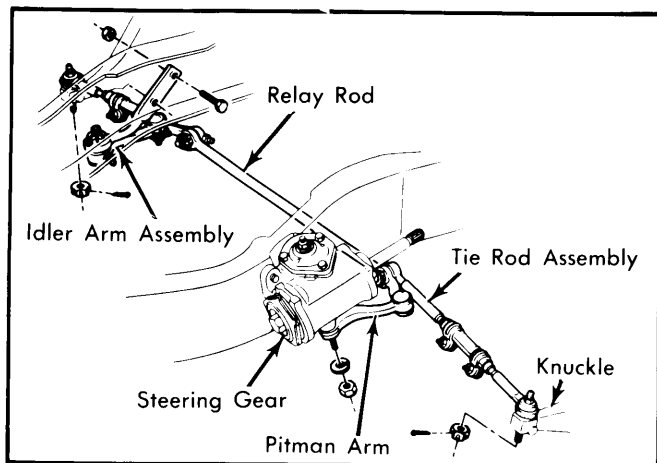


Fig. 1 "C" Model Steering Linkage

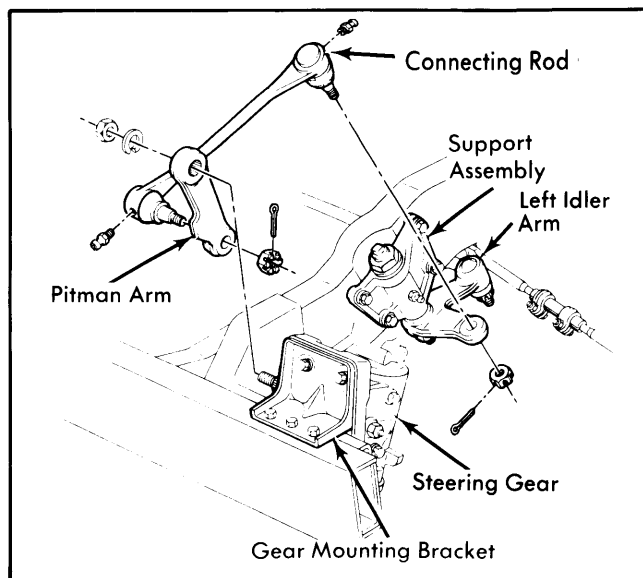


Fig. 3 "P" Model Steering Linkage

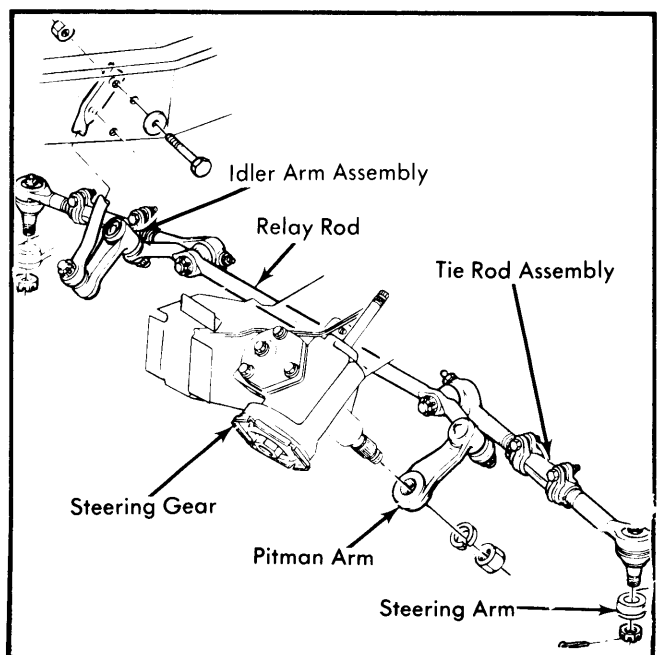


Fig. 2 "G" Model Steering Linkage

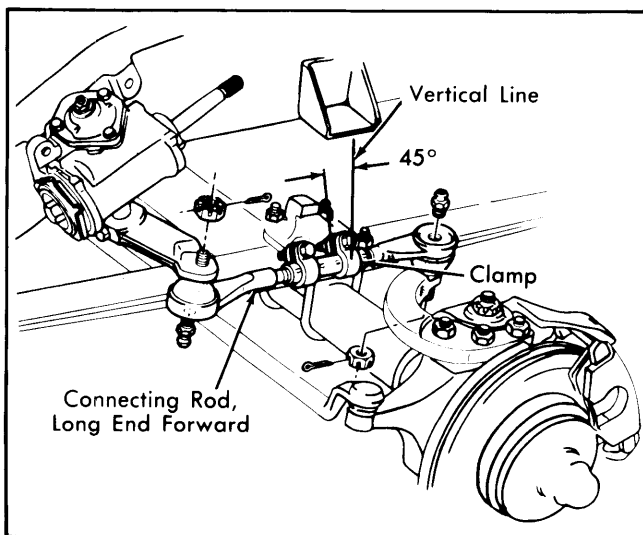


Fig. 4 "K" Model Steering Linkage

2) To remove tie rod ends from tie rod, loosen clamp bolts and unscrew end assemblies. Tie rod adjuster clamp bolts often become rusted in service. It is recommended that if torque required to remove the nut from a bolt after breakaway exceeds 7 ft. lbs., discard the nuts and bolts. Apply penetrating oil between clamps and tube, and rotate clamps until they move freely. Use new fasteners of same part number during reassembly to assure proper clamping at specified nut torque.

3) To install tie rods, use following procedure: Lubricate tie rod threads with EP chassis lube and install tie rod ends making sure both are threaded an equal distance from tie rod. Check that threads on ball studs and nuts are clean and

smooth. Check condition of ball stud seals and replace if necessary using suitable tool (J-24434). Install ball studs in steering arms and relay rod. Install ball stud nuts and torque to specifications, and install new cotter pins. Adjust toe-in. See *Wheel Alignment Specifications & Procedures* in **WHEEL ALIGNMENT** Section.

4) Before tightening tie rod adjusting sleeve clamp bolt, note the following: Clamps must be between locating dimples at either end of sleeve. Adjuster sleeve slot must not be within open area of clamp jaw opening (see Fig. 6 and 7). Slot in adjuster sleeve must not be within open area of clamp jaws.

5) Rotate both inner and outer tie rod housing rearward to limit of ball joint travel before tightening clamps. After tightening clamps, return tie rod assembly to center of travel. Check each tie rod for a rotation of at least 35° using a bubble protractor and a pair of vise grips. Lubricate inner and outer tie rod ends.

Steering Linkage

GENERAL MOTORS (Cont.)

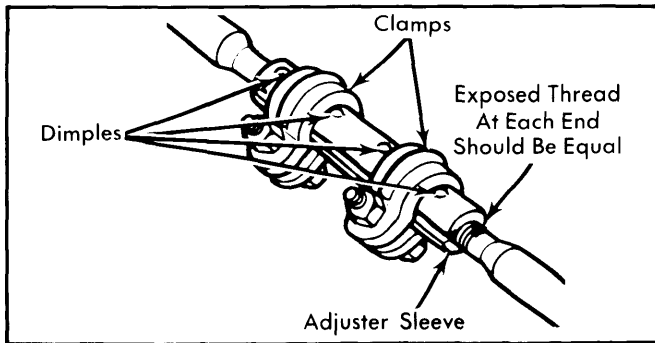


Fig. 5 Position of Tie Rod Clamps

ALL MODELS

Relay Rod Removal - 1) Remove inner ends of tie rods from relay rod (on models where applicable). Remove relay rod ball stud cotter pins and castellated nuts. Remove relay rod from pitman and idler arms by tapping on relay rod ball stud bosses with a hammer, while using another hammer as a backing.

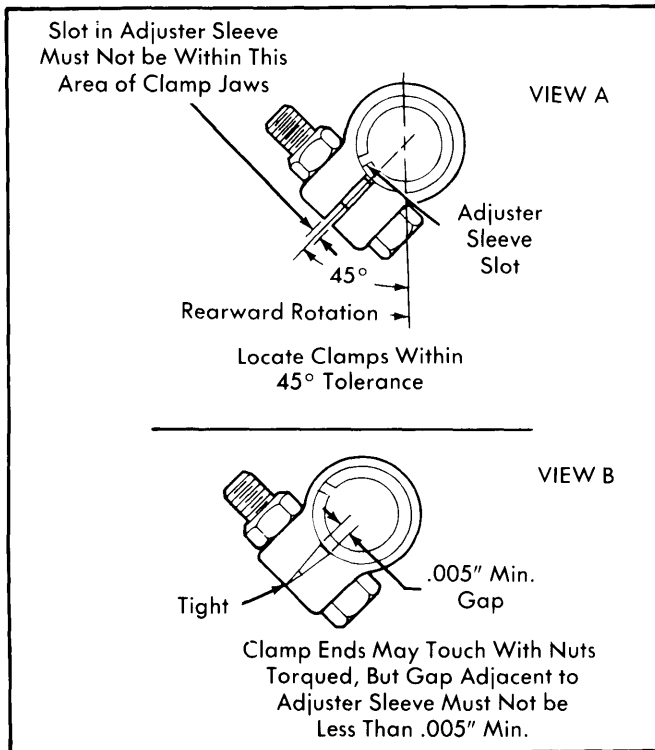


Fig. 6 Tie Rod Clamp Position "C", "K" and "P" Models

2) To install, reverse removal procedure and note following: Check ball studs and nuts for clean and smooth threads. Check stud seals and replace if necessary. Torque nuts and install new cotter pins.

Idler Arm Removal - 1) Place vehicle on a hoist. Remove fasteners from ball stud at relay rod. Remove ball stud from relay rod by tapping on relay rod boss with a hammer, while using another hammer as a backing. Remove idler arm-to-

frame bolts and remove idler arm assembly. **NOTE** - Idler arm assembly should always be replaced if it is found that an up and down force of 25 lbs., applied at relay rod end of idler arm, produces a vertical lash of more than 1/8" in straight ahead position.

2) To install, reverse removal procedure while noting the following: Ensure that threads on studs and nuts are clean and smooth. Check ball stud seals and replace if necessary. Install connecting rod while making sure long end of rod is toward pitman arm. See illustrations for proper alignment and orientation of connecting rod clamps.

Pitman Arm Removal - 1) Raise vehicle on a hoist. Remove cotter pin from pitman arm ball stud and remove nut. Remove pitman arm or relay rod from ball stud by tapping on side of rod or arm (in which stud mounts) with a hammer while using another hammer as a back-up. Remove pitman arm nut from shaft or clamp bolt from pitman arm, and mark arm-to-shaft position. Remove pitman arm from shaft using suitable puller.

2) To install, reverse removal procedure and note following: If a clamp type pitman arm is used, spread pitman arm with a wedge just enough to slip arm onto shaft by hand pressure. Do not hammer or damage to steering gear may result. Be sure to reinstall the hardened steel washer before installing nut.

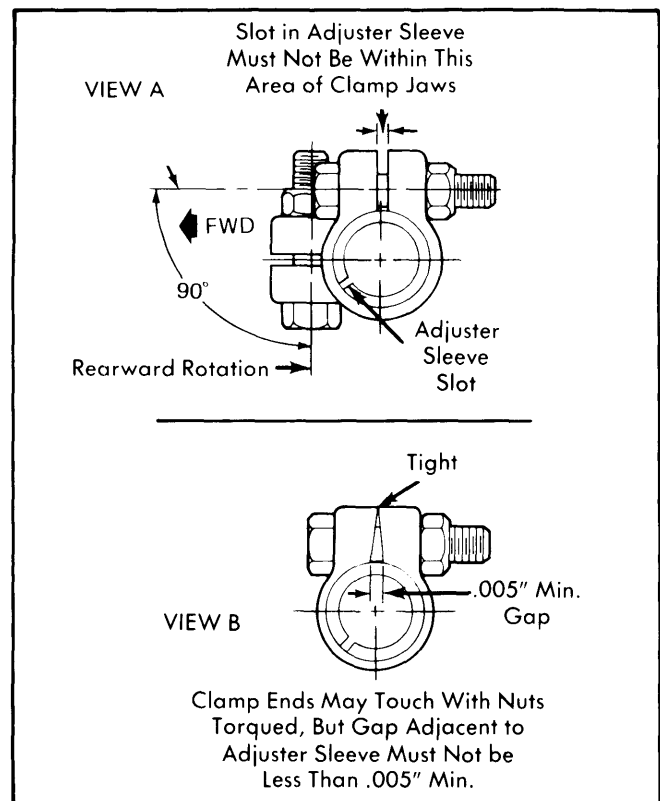


Fig. 7 Tie Rod Clamp Position "G" Model