

## AMERICAN MOTORS – CONCEALED

**Matador Coupe  
Pacer**


### DESCRIPTION

Wiper motor is a two speed permanent magnet depressed park type, with bush end plate at one end of housing and a gear housing at the other end. Park switch is located in gear cover and park mechanism is located in output arm. As optional equipment, intermittent operation of wiper motor is controlled by a variable resistor in wiper switch in conjunction with an electronic governor. This allows for a variable pause between wiping cycles.

### TESTING

#### WIPER MOTOR CURRENT DRAW

Perform test with motor on car and linkage disconnected or on bench. Connect ammeter (see illustration). Connect a jumper wire from battery to low speed terminal on motor end plate and read current draw. Move jumper to high speed terminal and read current draw. In both cases, current draw should not exceed 3.5 amps.

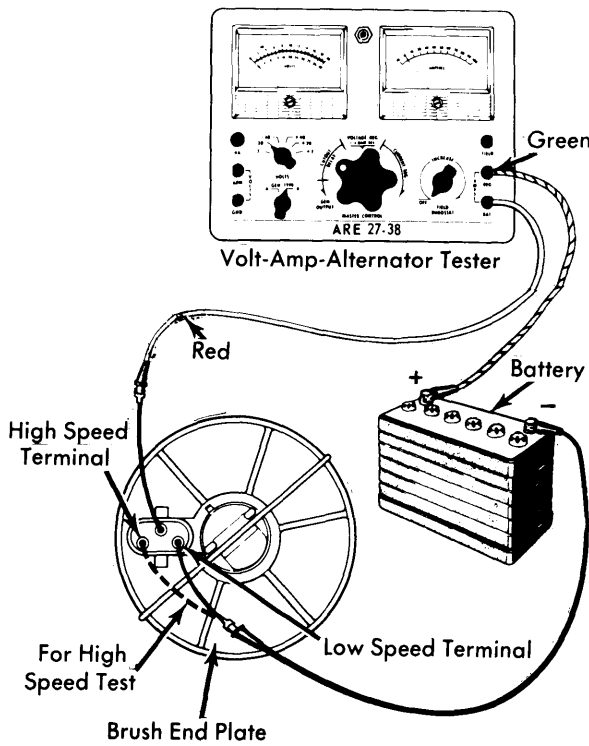

**Fig. 1 Meter Connections for Motor Current Draw Test**


#### WIPER CONTROL SWITCH TESTS

1) Check continuity using a test lamp or ohmmeter. Continuity should exist between various switch positions as shown in Fig. 2, and in Wiper Switch Continuity Test Charts.

2) Variable resistance between "F" and "E" (Pacer) and "6" and "7" (Matador) must be checked with an ohmmeter. The resistance controls governor operation for intermittent wipe. If

intermittent wipe is inoperative, but system will operate at high and low speeds, this resistance should be checked. With switch control knob rotated to full counterclockwise position, ohmmeter should indicate 8,000 to 13,000 ohms (Pacer) or 5,600 to 8,400 ohms (Matador). As switch is rotated in a clockwise direction, resistance should decrease to 100 to 900 ohms, both vehicles.

3) If continuity and resistance do not exist as specified, replace switch.

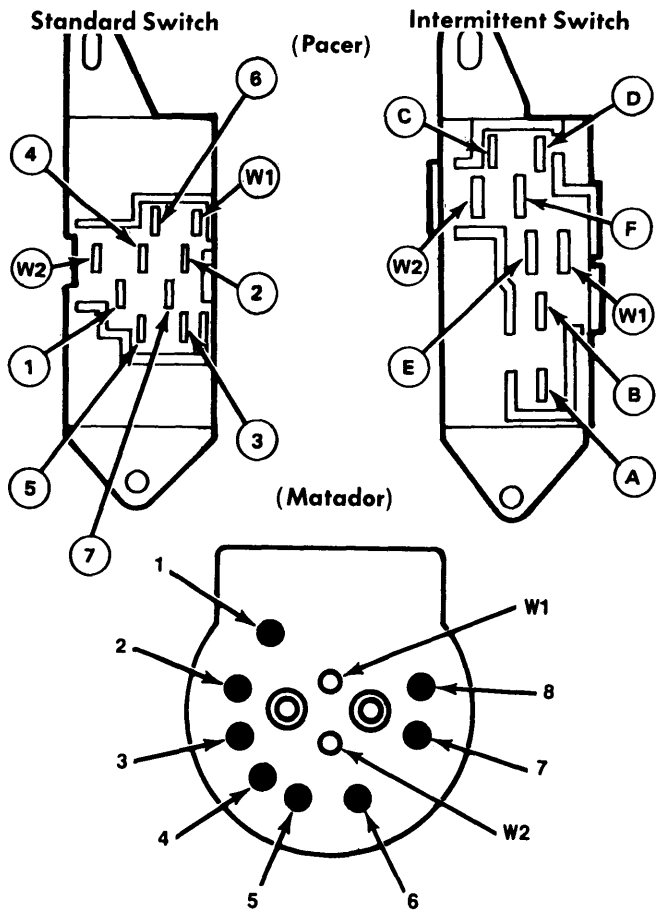

**Fig. 2 Wiper Control Switch Terminal Identification**

#### Wiper Switch Continuity Tests

Standard Wiper	Switch Position	Terminal Continuity
Matador.....	Off (Park).....	2-3, 1-8, 6-7
	Low .....	3-4, 1-7-8
	High.....	4-5, 1-7-8
	Wash.....	W1-W2
Pacer.....	Off (Park).....	1-5, 3-7
	Low .....	1-4, 2-7
	High.....	1-4, 2-6
	Wash.....	W1-W2

## AMERICAN MOTORS – CONCEALED (Cont.)

### Wiper Switch Continuity Tests (Cont.)

Intermittent Wiper	Switch Position	Terminal Continuity
Matador.....	Off (Park).....	2-3, 1-8
	Low .....	3-4-6-7, 1-8
	High.....	4-5-6-7, 1-8
	Intermittent .....	1-8, 3-4-6
	Wash.....	W1-W2
Pacer.....	Off (Park).....	A-E
	Intermittent .....	B-E-F
	Low .....	B-E-F-C
	High.....	D-B-F-C
	Wash.....	W1-W2

### WIPER MOTOR PARK TEST

Operate motor and stop motor when output arm is about 90° past park position for this test. With jumper wires connected as shown in illustration, the motor output arm should move in following cycle: Rotate in normal direction, then reverse rotation for about 10-15°, and stop rotation while crank arm is moved outward in a semicircular motion. Then finally stop in park position with current draw reducing to zero.

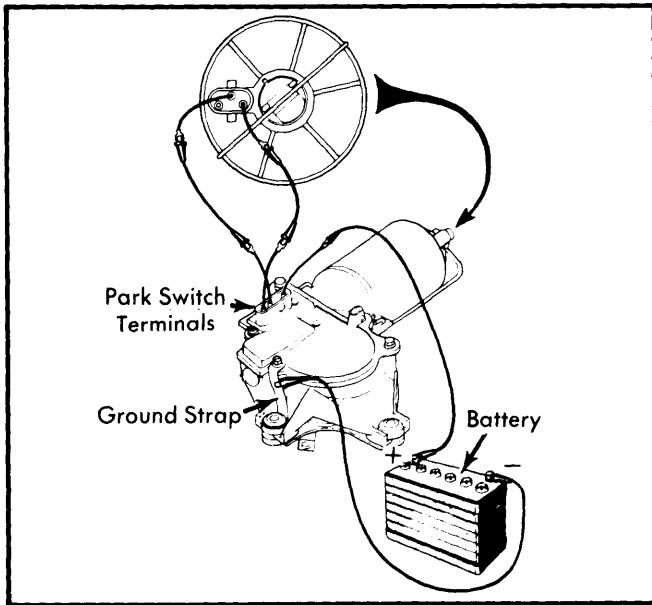


Fig. 3 Meter Connection for Wiper Motor Park Test

### REMOVAL & INSTALLATION

#### WIPER ARM, PIVOT SHAFT & LINKAGE DRIVE ARM

Remove wiper blade and arm as an assembly by lifting blade away from glass and pushing outward on tab on wiper arm release latch at pivot shaft. Remove cowl screen on Matador. Remove pivot shaft body retaining screws from cowl. Disconnect linkage drive arm from motor output arm crankpin by removing retaining clip. Remove pivot shaft assembly from cowl (through cowl opening on Matador). To install, reverse removal procedure.

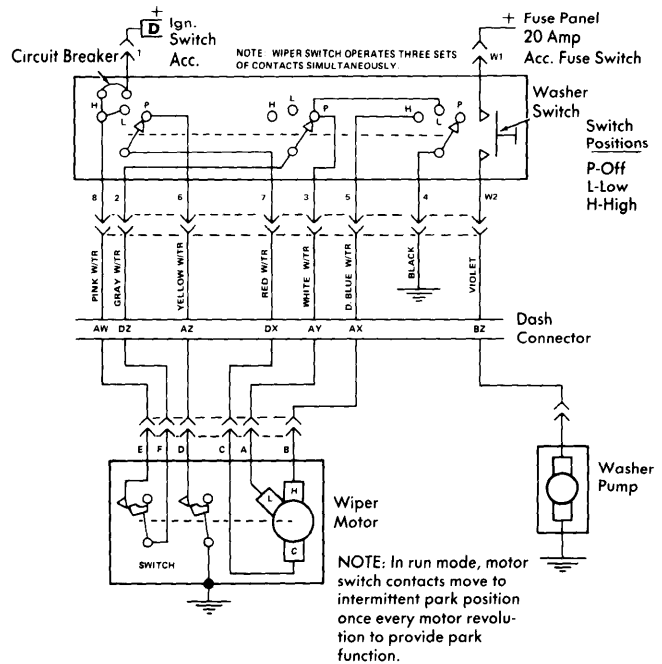


Fig. 4 AMC Matador Concealed Standard Wiper System Wiring Diagram

### WIPER MOTOR

**Matador** – Remove wiper arm, pivot shaft and linkage drive arm as previously described. Disconnect motor electrical leads. Remove motor retaining screws and remove motor. **NOTE** – If output arm catches on firewall, turn output arm **CLOCKWISE** for clearance. To install, reverse removal procedure insuring that output arm is in the park position.


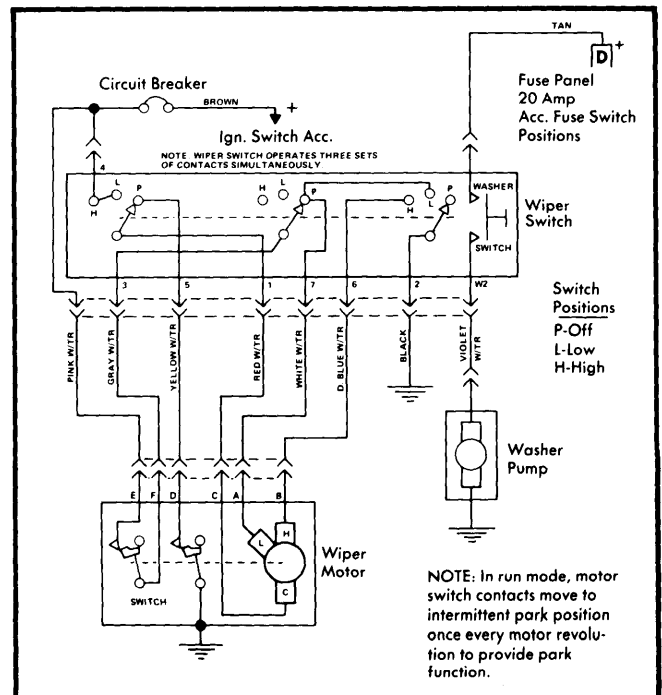


Fig. 5 AMC Pacer Concealed Standard Wiper System Wiring Diagram


# Wiper/Washer Systems

## AMERICAN MOTORS – CONCEALED (Cont.)

**Pacer** – Remove vacuum canister and bracket. Disconnect linkage drive arm by removing retaining clip from motor output arm crankpin. Remove nuts and screws retaining heater housing and pull heater housing away from area. Remove wiper motor plate retaining screws and remove motor from cowl. Disconnect motor electrical leads and separate motor from plate by removing retaining screws. To install, reverse removal procedure, insuring that output arm is in the park position.

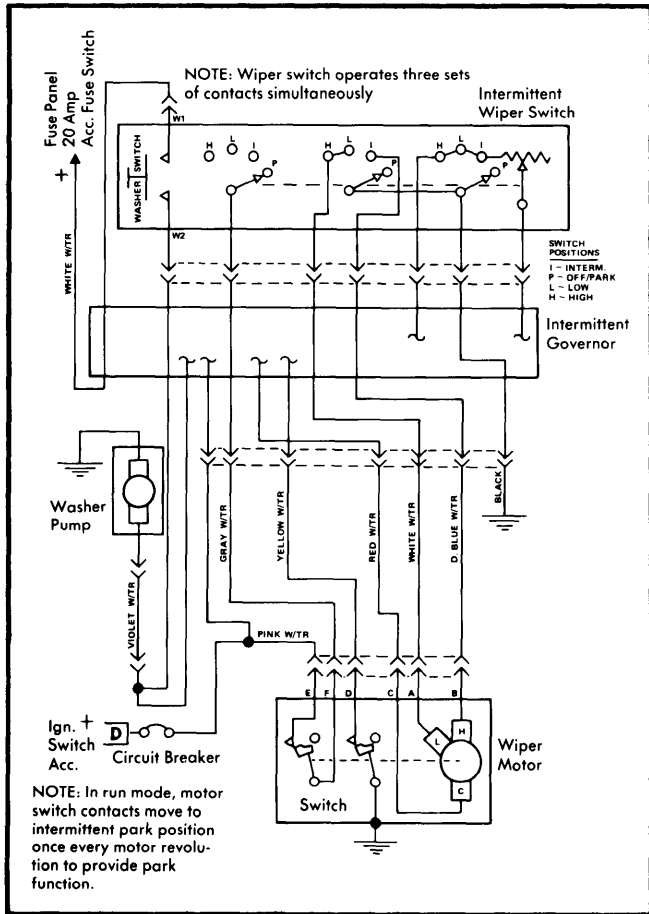

**Fig. 6 AMC Pacer Concealed Intermittent Wiper System Wiring Diagram**

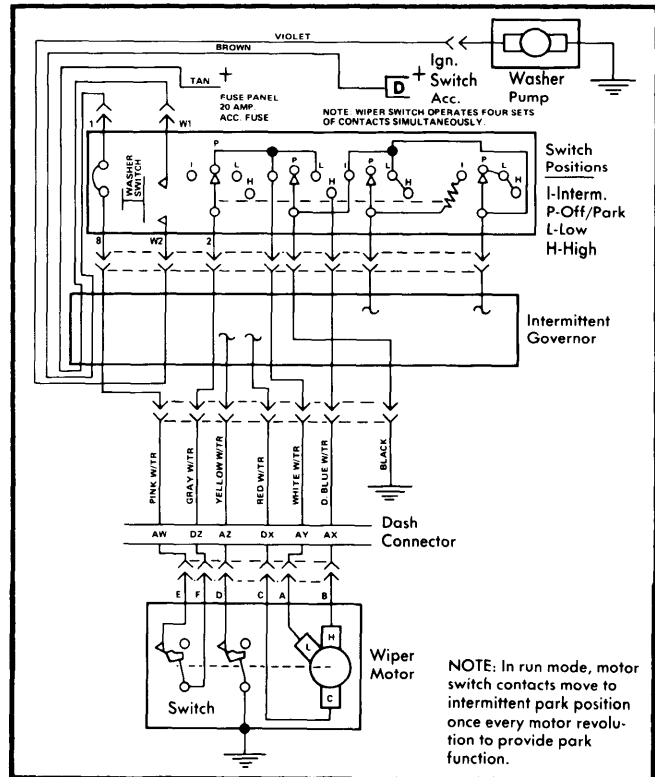

**Fig. 7 AMC Matador Concealed Intermittent Wiper System Wiring Diagram**

### DISASSEMBLY & ASSEMBLY

#### WIPER MOTOR

**NOTE** – Motor is serviced as an assembly, or in major subassemblies.

**Cover and Switch** – Remove cover retaining screws and replace cover and switch as an assembly, insuring ground strap is installed under a cover retaining screw.

**Brush End Plate** – Note position of bale retainer and pry off using a screwdriver. Remove end plate and plug. Replace plate and brushes as an assembly using a fine wire probe through hub opening to position brushes on commutator. Rotate end plate so key aligns with notch and assemble plug. Carefully install bale retainer.