

ALL MANUFACTURERS

DESCRIPTION

Ignition switches are typically mounted on steering columns (exc. Chrysler Corp. vehicles with standard columns) and are actuated by ignition key locking mechanisms. Chrysler Corp. vehicles with standard columns have ignition switch and ignition key lock cylinder integral with lock housing below steering wheel.

LOCK CYLINDER

All Cars – Lock has two wing tabs and ignition key has large head for ease in grasping and improved operating leverage. Key can be removed only in "LOCK" position with ignition off and transmission engaged (automatic transmission in "PARK", manual transmission in "REVERSE"). Steering wheel will be locked or will lock immediately when wheel is turned.

IGNITION SWITCH

All Models (Exc. Chrysler Corp. Standard Column) – Sliding type switch mounted on steering column and controlled by an actuating rod operated by the lock cylinder through a rack-and-sector mechanism. Up and down movement of actuator rod moves the switch slider back and forth within switch housing, establishing the various switch positions.

Chrysler Corp. Standard Column – Rotating type switch mounted directly across from lock cylinder and attached to it by a cam and pin. Switch turns directly with lock and key to establish the various switch positions.

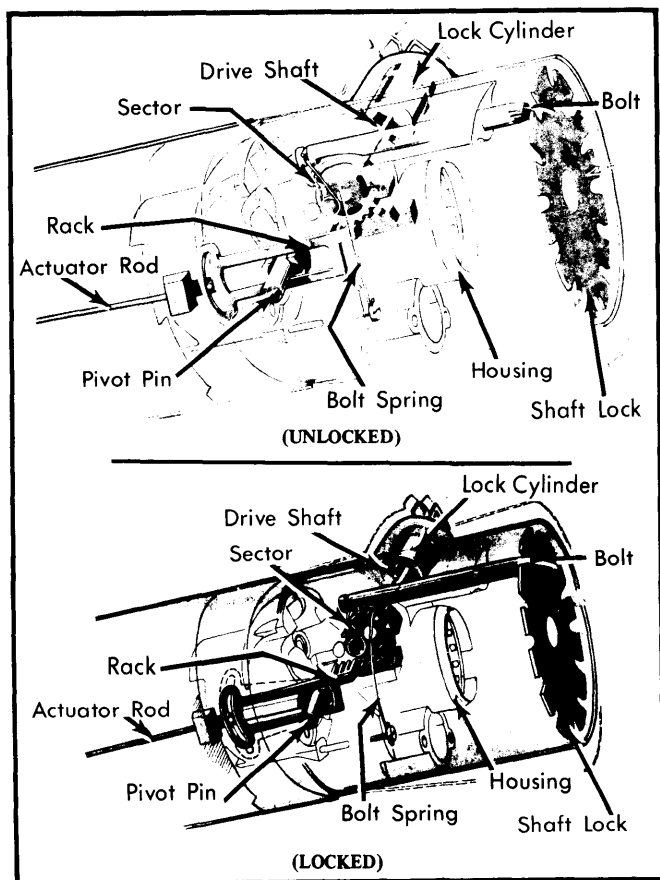


Fig. 1 General Motors Steering Column Locking Mechanism (Others Similar)

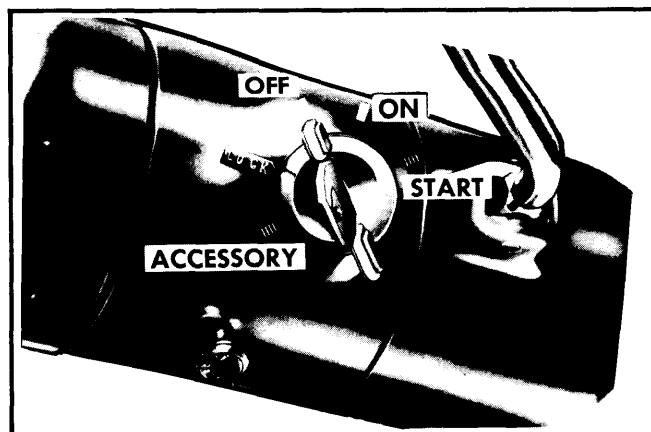


Fig. 2 Steering Column Lock Positions Common to All Models

OPERATION

Switch operation on each key position is detailed below. Ignition key can be removed only when switch is in "LOCK" position.

"Accessory", "On" & "Start" – Switch operations are the same as previous cars. Switch will return to "ON" position from "START" when released.

"Off" – In this position, steering wheel and transmission shift linkage are unlocked and can be moved without having the engine running.

"Lock" – Key can only be moved to "LOCK" position with transmission linkage in "PARK" or "REVERSE". When a slot in shifter bowl lock bracket (in steering column) is aligned with a raised step on the ignition lock actuating rod rack which allows the rack to move into the locked position. The step then locks the shifter bowl lock bracket to prevent shifting of the transmission. At the same time, lock cylinder moves a spring loaded lock bolt up into engagement with one of twelve slots in a lock plate splined on upper end of steering shaft. This action locks steering wheel (if lock bolt not aligned with a lock plate slot, spring will be compressed and lock bolt will engage slot when steering wheel is turned slightly). If ignition key is left in ignition switch in "LOCK" position, key warning buzzer will sound in usual manner when front door on drivers side is opened.

NOTE – On models with floor mounted shift linkage, steering column incorporates a shifter tube and lock bracket which is similar to that used with steering column mounted shift linkage. An interlock linkage (cable or rod) is used between the lower end of the shifter tube and transmission case shift lever to provide a back-drive so that ignition switch locking feature operates in same manner for all transmission types.

SERVICING

Steering column must be lowered or removed for access to ignition switch on some vehicles. Steering wheel, directional signal and other components must be removed to gain access to lock cylinder retaining tab for lock cylinder removal.

CAUTION – Steering columns are collapsible; special care must be taken to avoid bumping, jolting or hammering on steering shaft and gearshift tube. See Steering Wheel, Horn Button, Turn Signal Switch and Steering Columns in STEERING Section.

ALL MANUFACTURERS (Cont.)

REMOVAL & INSTALLATION

LOCK CYLINDER

NOTE — If lock cylinder retaining tab is not visible through hole (slot) clean flashing away to gain access to lock retaining tab.

Removal (American Motors & General Motors) — Place key in "LOCK" position ("RUN" position on General Motors standard columns). Insert a thin tool (screwdriver or knife blade) into slot next to upper right switch mounting screw boss. Depress lock cylinder retaining tab and at the same time pull lock cylinder from housing bore.

Installation — 1) Hold lock cylinder sleeve and rotate cylinder clockwise against stop. Insert cylinder into housing with key on cylinder sleeve aligned with keyway in housing.

2) Lightly push cylinder against sector, rotate cylinder counterclockwise until cylinder mates with sector. Push in until cylinder retainer tab snaps into place and cylinder is secured.

Removal (Chrysler Corp. Standard Column) — Place cylinder in "LOCK" position and remove key. Insert a small diameter screwdriver or similar tool into lock cylinder release hole. Push in to release spring loaded lock retainer and pull lock cylinder out of housing bore.

Installation — Turn key to "LOCK" position and remove key. Insert cylinder into housing until switch actuator is contacted. Insert key, press inward and rotate cylinder. When parts align, cylinder will move inward and a spring loaded retainer will snap into place, locking cylinder into housing.

Removal (Chrysler Corp. Omni & Horizon) — Remove steering wheel, both column covers and turn signal switch. Use a hack saw blade and cut the upper $\frac{1}{4}$ " from the key cylinder retainer pin boss. Using a drift punch, drive roll pin from housing and remove key cylinder.

Installation — Insert cylinder into housing making sure that it engages lug on ignition switch driver. Install the roll pin.

Removal (Chrysler Corp. Tilt-Wheel & Tilt-A-Scope) — Place cylinder in "LOCK" position. Insert a small screwdriver or similar tool into slot next to switch mounting screw boss (right-hand slot). Depress spring latch at bottom of slot and pull lock cylinder out of housing bore.

Installation — Turn key to "LOCK" position and remove key. Insert cylinder into housing far enough to contact switch actuator. Press inward and move switch actuator rod up and down to align parts. When parts align, the cylinder will move inward and a spring loaded retainer will snap into place locking the cylinder into the housing.

NOTE — Before attempting removal of lock cylinder, place shift lever in "PARK" position on automatic transmission models, or any gear position on manual transmission models, and place ignition switch in "ON" position.

Removal (Ford Motor Co.) — On fixed column units, insert a wire pin in lock cylinder hole located inside column near bottom of lock cylinder housing. On tilt column units, insert wire

pin in hole located on outside of column casting next to hazard flasher button. Depress wire pin and pull out on lock cylinder.

Installation — With lock cylinder in "ON" position, insert lock cylinder into housing bore in column and turn key to "OFF" position. The action will extend lock cylinder retaining pin into flange. Insert key in lock and cycle cylinder to insure correct operation in all positions.

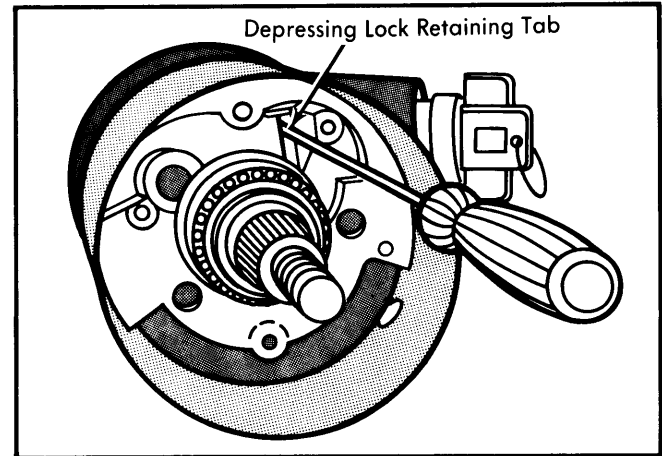


Fig. 3 Depressing Lock Cylinder Retaining Tab on American Motors and General Motors Vehicles

IGNITION SWITCH

Removal (American Motors) — Place key lock in "OFF LOCK" position and remove switch mounting screws. Disconnect switch from remote rod, remove harness connector and remove switch.

Installation (Standard Column) — With actuator rod disconnected, position switch lever actuator rod and steering column. Move slider toward steering wheel placing switch in "ACCESSORY" position. Position actuator rod in slider hole and fasten switch to column being careful not to move slider out of detent.

Installation (Tilt Column) — With actuator rod disconnected, position switch over rod and steering column. Move switch slider downward from steering wheel placing switch in "ACCESSORY" position. Position actuator rod in slider hole, place switch on column and lightly push switch down column to remove lash in rod, do not move slider out of detent; then tighten switch screws.

Removal (Chrysler Corp. Standard Column) — Remove 3 switch retaining screws from end of column and lift out switch.

Installation — Place ignition switch in center detent ("OFF" position). Feed wires down through space between housing and jacket. Position switch in housing and tighten 3 retaining screws.

ALL MANUFACTURERS (Cont.)

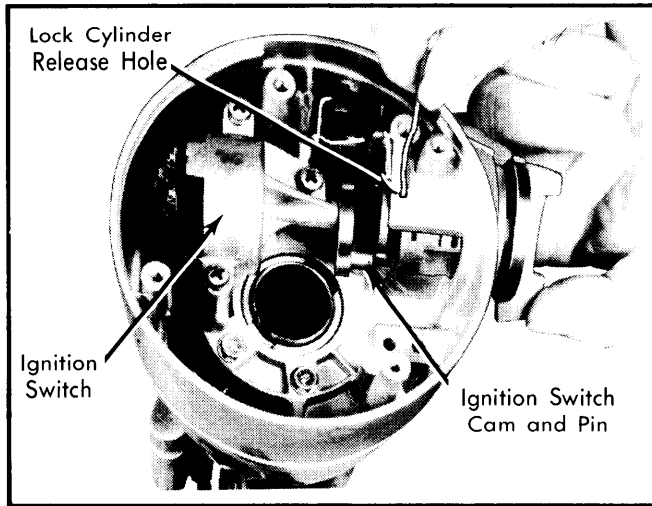


Fig. 4 Depressing Lock Cylinder Retaining Tab Chrysler Corp. Models with Standard Steering Columns

Removal (Chrysler Corp. Tilt-Wheels) – Place ignition switch in "ACC" position and remove switch mounting screws. Remove switch from column and actuating rod from switch.

Installation – 1) Place ignition lock in "ACC" position by holding switch in left hand and actuator rod in right hand. Move slider to extreme left ("ACC" position).

2) Fit actuator rod into slider and mount switch to column using 2 retaining screws. Push switch down lightly to remove lash in actuator rod, then tighten mounting screws to 35 INCH lbs.

CAUTION – When tightening screws, do not move switch from detent position.

Removal (Chrysler Corp. Omni & Horizon) – Remove connector from ignition switch and place cylinder in "LOCK" position, and remove key. Remove mounting screws from switch; switch and push rod will drop below jacket. Rotate switch 90° to permit removal of switch from push rod.

Installation – Position switch in "LOCK" (second detent from top). Place switch at right angles to column and insert push rod. Align switch on bracket and tighten screws. Reinstall connector and connect battery cable. Check switch for proper operation.

Removal (Ford Motor Co.) – Disconnect negative battery cable and steering column trim shroud. Disconnect ignition switch electrical connector and drill out the break-off head bolts connecting the switch to the lock cylinder housing using a 1/8" drill. Remove ignition switch from the actuator pin.

Installation – 1) When installing switch, both locking mechanisms at top of column and switch itself must be in "LOCK" position. To hold mechanical parts of column in

"LOCK" position, place shift lever in "PARK" (Automatic transmission) or reverse (Manual transmission), turn key to "LOCK" position and remove key.

2) Pull switch plunger out as far as it will go then move it in one detent ("LOCK" position). Insert a 7/16" drill bit into locking hole on top of switch. Switch is now pinned in "LOCK" position.

3) Connect switch plunger to actuator rod. Position switch on column and loosely install retaining nuts. Move switch up and down to locate mid-position of rod lash then tighten retaining nuts.

Removal (General Motors) – 1) Steering column must be lowered or removed (Tilt or Telescope columns) or turn signal switch removed (Standard column).

NOTE – On tilt or telescope columns, steering wheel removal is not required.

2) Position switch in "ACC" on tilt or telescope columns, or "OFF" on standard columns. If lock cylinder has already been removed, the actuating rod should be pulled up until it stops.

3) On standard columns, push actuating rod down one detent ("OFF" position). Remove switch screws and lift switch from actuating rod and column.

Installation – 1) With lock cylinder in "OFF-UNLOCK" position (Tilt or Telescope columns) or "OFF" position (Standard column), insert a small screwdriver into hole in switch and move slide portion of switch to top position.

2) On Standard column models, move slider part of switch back one detent ("OFF" position). Fit actuator rod into slider hole and loosely assemble switch on steering column. On Standard column, tighten retaining screws to 35 INCH lbs.

On other columns, lightly push switch down column to remove slack in rod, then tighten screws to 35 INCH lbs torque. Connect wiring and check operation of switch.

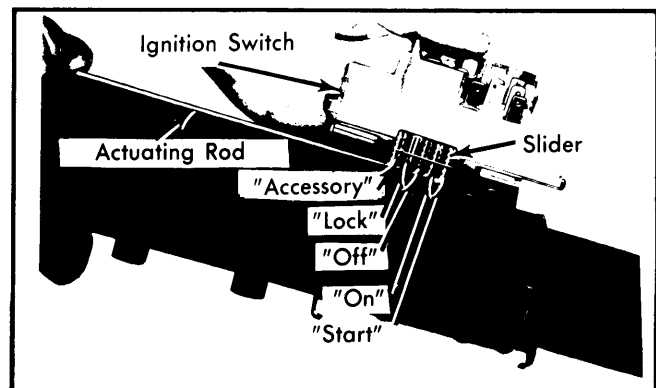


Fig. 5 Rod Actuated Ignition Switch Common to All Models