

318", 360", 400" & 440" V8

IDENTIFICATION CODING

ENGINE IDENTIFICATION

Engine identification number locations are as follows: 318" and 360" on left front of block below cylinder head; 400" on right side of block next to distributor; 440" on a pad on left bank next to front tappet rail. Number is decoded as follows on 318" and 360" engines:

8M31810172579

1st Digit – Model Year (8-1978)
2nd Letter – Manufacturing Plant
3rd,4th&5th Digit – Engine Displacement
6th,7th,8th&9th Digit – Build Date
Remaining Digits – Sequence Number

Number is decoded as follows on 400" and 440" engines

8T400H10172A

1st Digit – Model Year (8-1978)
2nd Letter – Manufacturing Plant
3rd,4th,5th Digit – Engine Displacement
6th,7th,8th&9th Digit – Date Code
Remaining Digits – Sequence Numbers

SPECIAL ENGINE MARKS

Information identifying undersize crankshaft journals, oversize cylinder bores, tappets and valve stems is stamped in various locations on engine, depending on engine. Information and location is decoded as follows:

318" & 360" Engines

R Or M – Numbers 1, 2, 3 or 4 following R or M indicates .001" undersize rod or main bearing journals and which journal is undersize. Stamped on number eight crankshaft counterweight on 318" engine and on number three crankshaft counterweight on 360" engines.

RX Or MX – Indicates all rod or main bearing journals are .010" undersize. Stamped on number eight crankshaft counterweight on 318" engines and on number three crankshaft counterweight on 360" engines.

A – Indicates .020" oversize cylinder bore. Stamped after engine identification number.

"♦" – Indicates .008" oversize tappets. Stamped on top pad at front of engine and on flat surface at outside of each tappet bore.

X – Indicates .005" oversize valve stems. Stamped on milled pad adjacent to two $\frac{3}{8}$ " tapped holes on each end of cylinder head.

400" & 440" Engines

R Or M – Numbers 1, 2, 3 or 4 following R or M indicates .001" undersize rod or main bearing journals and which journal is undersize. R-10 or M-10 indicates rod or main bearing journals are .010" undersize. Both are stamped on number three crankshaft counterweight.

A – Indicates .020" oversize cylinder bore. Stamped in top pad at front of engine.

"♦" – Indicates .008" oversize tappets. Stamped in top pad at front of engine.

O.S. – Indicates .005" oversize valve stems. Stamped in single bolt boss in end of head.

ENGINE REMOVAL

See *Engine Removal* at end of *ENGINE* Section.

CYLINDER HEAD & MANIFOLDS

INTAKE MANIFOLD

Removal – 1) Drain cooling system and disconnect upper radiator hose, by-pass hose and heater hoses. Disconnect battery ground and remove alternator, air cleaner and fuel line to carburetor.

2) Disconnect accelerator linkage, coil wires and temperature sending unit wire. Remove distributor cap, wires and vacuum hose.

3) On 400" and 440" engines, disconnect diverter valve vacuum line from intake manifold, air pump line at exhaust manifolds and diverter valve on the high mounted air pump (if equipped). Do not remove the low mounted air pump.

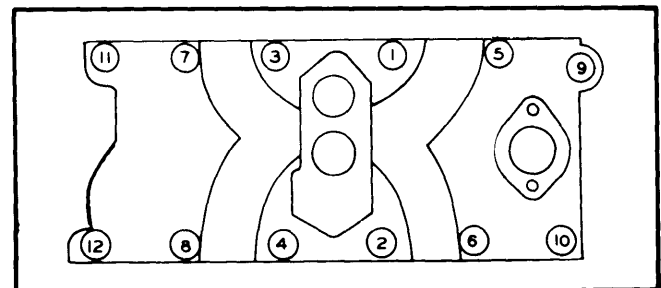


Fig. 1 318" & 360" Engine Intake Manifold Tightening Sequence

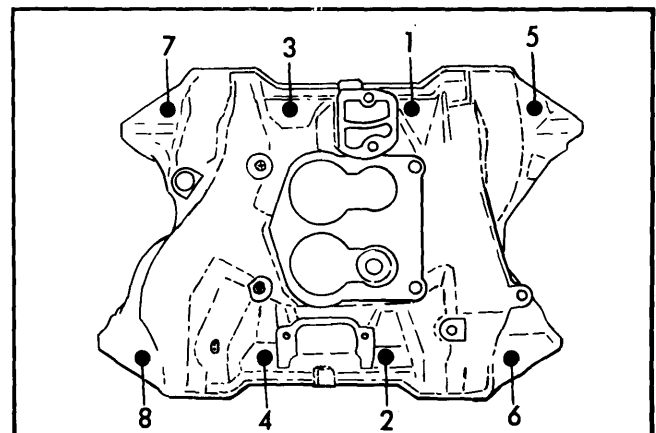


Fig. 2 400" & 440" Engine Intake Manifold Tightening Sequence

318", 360", 400" & 440" V8 (Cont.)

4) Remove closed ventilation system, evaporation control system and rocker covers.

5) Remove intake manifold bolts and remove intake manifold, coil and carburetor as an assembly.

Installation (318" & 360") — Coat intake manifold side gaskets with gasket sealer on 318" engines. On 360" engines, do not use sealer on side composition gaskets. Position side and end gaskets in place on cylinder block and carefully lower intake manifold into position. Install cap screws finger tight. Tighten bolts in sequence shown in Fig. 2. Make sure to use two steps when torquing bolts.

Installation (400" & 440") — Install intake manifold, carburetor and coil as an assembly. Tighten manifold bolts in two steps.

CYLINDER HEAD

Removal — Remove intake manifold and exhaust manifold. Remove rocker arm and shaft assemblies. Remove push rods and identify them to insure installation in original location. Remove spark plugs and tappet chamber cover on 400" and 440" engines. Remove cylinder head bolts. Remove cylinder heads and gaskets.

Installation — Coat new gasket lightly with suitable sealer and install gaskets and cylinder heads. Install cylinder head bolts and tighten head bolts, in two steps, to specifications.

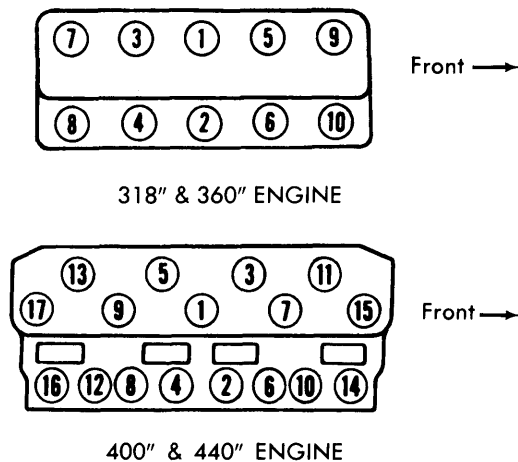


Fig. 3 Cylinder Head Tightening Sequence

VALVES

VALVE ARRANGEMENT

All — E-I-I-E-E-I-I-E

VALVE GUIDE SERVICING

Wear Check — Remove valve springs and install suitable sleeve over valve stem and install valve in guide. Attach dial indicator to cylinder head and set it at right angle to valve stem being measured. Total sideplay should not exceed .017". If dial reading is excessive or stems are scuffed or scored, ream guides for installation of valves with oversize stems.

Servicing — Ream guides to next oversize valve stem. Oversize valve stems are available in .005", .015" and .030" sizes.

NOTE — Do not attempt to ream guides from standard diameter to .030" oversize in one step. Use step procedure to obtain the .030".

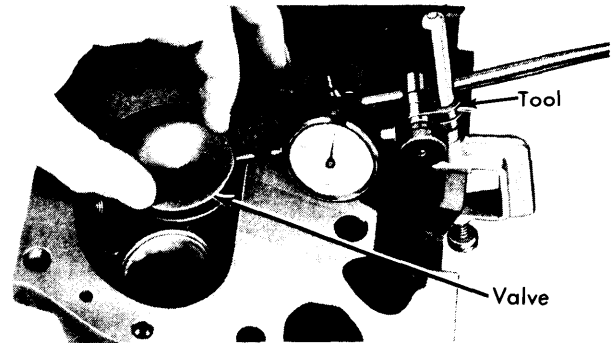


Fig. 4 Using Dial Indicator to Measure Valve Guide Wear

VALVE STEM OIL SEALS

Cup type seals used on all valves. Coat valve stems with oil and insert in cylinder head. Press new seals squarely over valve guide using valve stem as a guide. Do not force seal against top of guide as the sealing lip pressure of the seal will be greatly reduced.

VALVE SPRINGS

Removal — With cylinder head removed, compress valve springs using a suitable tool (C-3422A). Remove valve retaining locks, retainers, cup seals and valve springs.

Installation — Reverse removal procedure and only compress spring enough to install the locks. Check valve spring height.

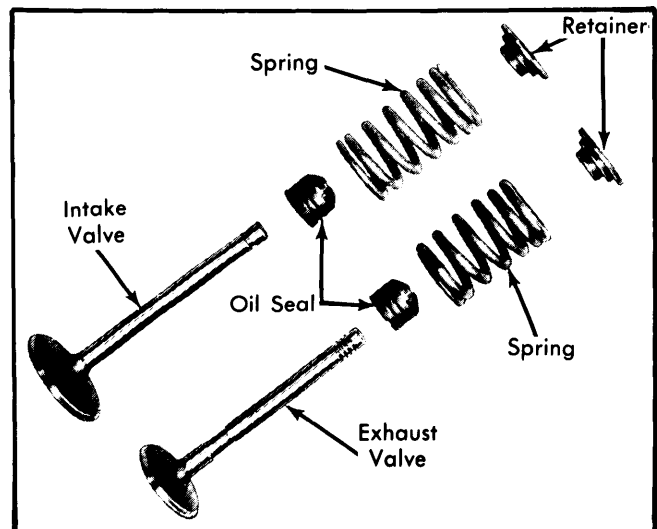


Fig. 5 Disassembled View of Intake and Exhaust Valve Assemblies

VALVE SPRING INSTALLED HEIGHT

Valve springs must be square within $\frac{5}{64}$ ". Installed height of springs (measured from spring contact area on head to underside of spring retainer) should not exceed specifications. If height is greater than maximum allowable, install a $\frac{1}{16}$ " spacer(s) to bring spring height back to normal. If spacers are installed, measure from top of spacer.

Valve Springs Installed Height

Engine	Minimum	Maximum
318" & 360"	1 $\frac{5}{8}$ "	1 $\frac{11}{16}$ "
400" & 440"	1 $\frac{53}{64}$ "	1 $\frac{57}{64}$ "

318", 360", 400" & 440" V8 (Cont.)

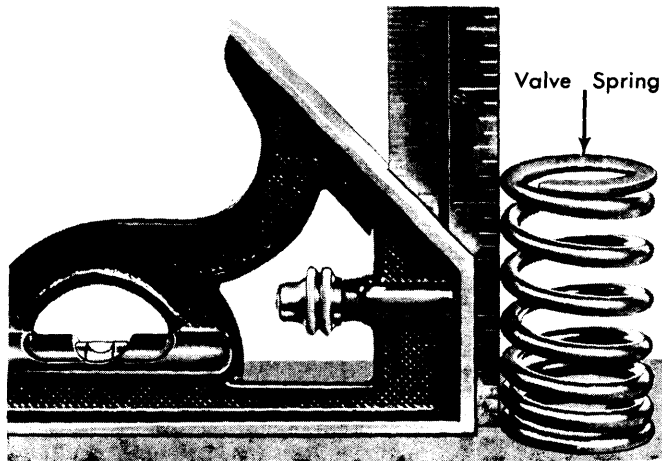


Fig. 6 Checking Valve Spring Squareness

ROCKER ARM ASSEMBLY

NOTE — Whenever rocker arm shaft assemblies are being installed, tighten support bracket bolts slowly and evenly in order that lifters have time to bleed down to operating length.

318" & 360" Engines — Notch on end of rocker shaft must face inward toward center of engine, and must point toward rear of engine on right bank and front of engine on left bank. Long stamped steel retainers go in number two and four positions.

400" & 440" Engines — Install rocker shafts with $\frac{3}{16}$ " lubrication holes pointing downward into the rocker arms and 15° angle of holes pointing outward toward valve end of rocker arm. **NOTE** — 15° angle of holes is determined from centerline of the bolt holes through the shaft which attaches shaft and bracket assembly to cylinder head. Long stamped steel retainers go in number two and four positions.

HYDRAULIC VALVE LIFTER ASSEMBLY

NOTE — Lifters are serviced as complete assemblies only. Parts are not interchangeable between lifters. If any component of lifter is worn or damaged, complete lifter must be replaced.

To test, remove cap from plunger (see illustration) and plunger from tappet body. Fill tappet body with clean kerosene and install plunger and cap. Place lifter upright in Lifter Testing Pliers and check leak down. If lifter collapses immediately, disassemble, clean and retest. If rapid leak down still occurs, replace lifter.

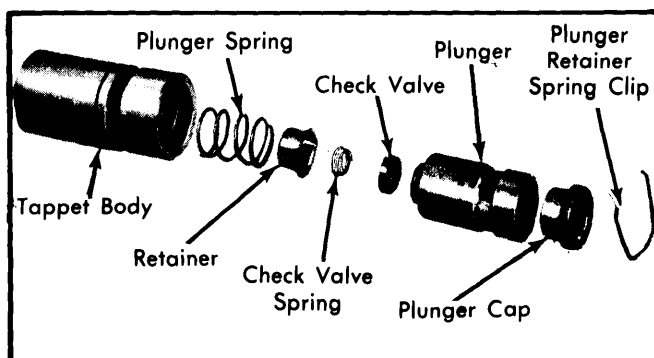


Fig. 7 Exploded View of Hydraulic Lifter Assembly

HYDRAULIC VALVE LIFTER ADJUSTMENT

Lifters are set at zero lash. Clearance between valve stem tip and rocker arm pad with lifter fully collapsed is .060-.210" on all engines.

PISTONS, PINS & RINGS

OIL PAN

See *Oil Pan Removal* at end of ENGINE Section.

PISTON & ROD ASSEMBLY

NOTE — When removing or installing piston and connecting rod assemblies, rotate the crankshaft so connecting rod journal is on the center of cylinder bore.

Removal (All Engines) — Remove ridge at top of cylinder bores using suitable tool (C-3012) before removing pistons from block. **NOTE** — Keep tops of pistons covered during this procedure. Rotate crankshaft and inspect connecting rods and rod caps for cylinder identification. Identify them if necessary. Remove rod cap and push each piston and rod assembly out top of cylinder bore being careful not to nick crankshaft journals. Install rod caps on mating rods.

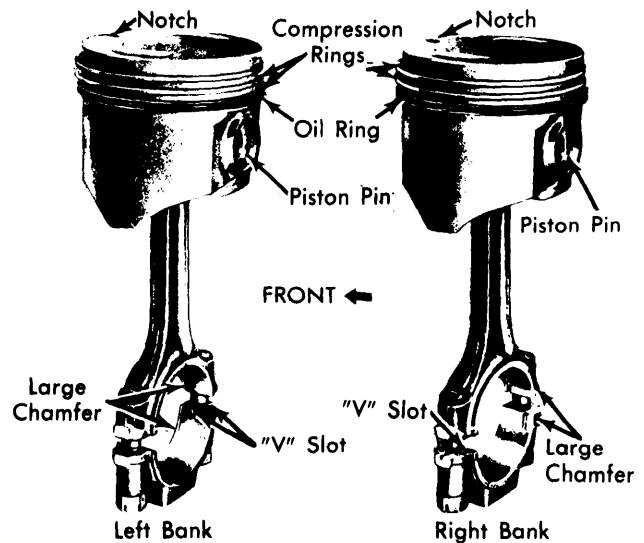


Fig. 8 Precautions for Assembling Piston to Connecting Rod

Installation — 1) Before installing piston and connecting rod assemblies into cylinder block, compression ring gaps must be staggered so neither is in line with oil ring rail gaps. The oil ring expander ends should be positioned under the notch on piston. Oil ring rail gaps should be facing middle of engine upon installation and spread 3" apart.

2) Immerse piston head and rings in clean engine oil and slide suitable ring compressor over piston and tighten. **NOTE** — Do not allow position of rings to change during ring compressor installation and tightening.

3) Rotate crankshaft so connecting rod journal is on center of cylinder bore. Insert rod and piston assembly into cylinder bore and guide rod over the crankshaft journal, taking care not to nick the journal. **NOTE** — Notch on top of piston must face front of engine and larger chamfer of connecting rod bore must be installed toward crankshaft journal fillet.

4) Tap piston into cylinder bore using wooden handle of a hammer and guide connecting rod into place on crankshaft

318", 360", 400" & 440" V8 (Cont.)

journal. Install rod cap and tighten. Repeat procedure for each piston assembly.

FITTING PISTONS

Pistons should be measured 90° to piston pin axis at top of skirt. Measure cylinder bore halfway down the bore 90° to crankshaft center line. Pistons and cylinder bores should be measured at normal room temperature, 70°F.

PISTON PINS

Removal – 1) Use one of the following tool combinations for piston pin removal:

- 318 engines; tool C-4158 with pilot C-4200-3 and anvil C-4200-1.
- 360" engines; tool C-4158 with pilot SP-5523 and anvil SP-5520.
- 400" and 440" engines; tool C-3684.

2) Install Pilot on main screw (Fig. 9) and fit screw through piston pin. Install anvil, spring removed, over threaded end of main screw. Make sure small end of anvil is against piston boss.

3) Install nut loosely on main screw and place assembly on press. Force pin from connecting rod.

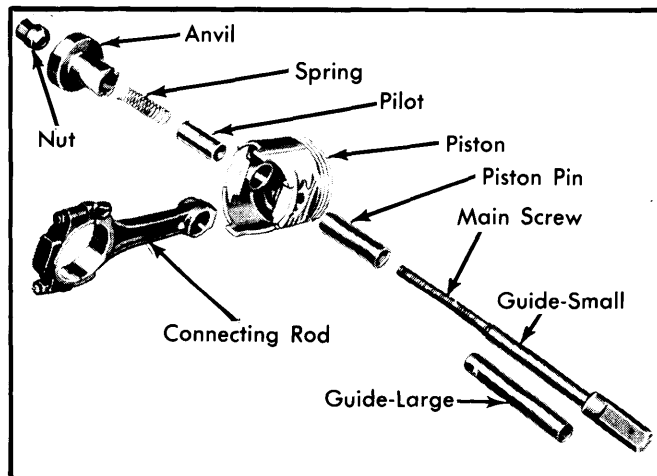


Fig. 9 Piston Pin Installation

Installation – 1) Lubricate piston pin holes and connecting rod and with same tools used for removal, install spring in pilot and pilot into anvil. Install piston over main screw.

2) Place piston (with front up) and connecting rod over pilot so pilot extends through piston pin holes. Assemble rods to pistons of the right cylinder bank (2,4,6 and 8) with indent on piston head opposite to larger chamfer on large bore end of connecting rod. Assemble rods to pistons of the left cylinder bank (1,3,5 & 7) with indent on piston head on the same side as the large chamfer on the large bore end of connecting rod.

3) Install main screw and piston pin in piston and install nut on main screw to hold assembly together. Place assembly in a vise. Press piston pin in until piston pin bottoms on the pilot.

Checking Pin Fit – Assemble suitable tool in the same manner as for piston pin removal and place assembly in a vise. Attach a torque wrench to nut and test torque to 15 ft. lbs. If connecting rod moves downward on the piston pin, reject connecting

rod and piston pin combination. Install a new connecting rod and recheck. If connecting rod does not move under 15 ft. lbs. torque, piston pin fit is satisfactory.

CRANKSHAFT & ROD BEARINGS

MAIN & CONNECTING ROD BEARINGS

NOTE – Following procedures are with oil pan and oil pump removed.

Connecting Rod Bearings – 1) **NOTE** – Use either Shim Stock method or Plastigage method to check bearing clearance. After ensuring rod caps are marked for identification, remove rod caps. Using Shim Stock method, smooth edges of a 1/2" by 3/4" piece of brass shim stock .002" thick. On 318", 400" 2-Bbl. and standard 440" models use shim stock .001" thick. Oil and place between bearing and connecting rod journal. Install bearing cap and tighten.

2) Rotate crankshaft 1/4 turn in each direction. If a slight drag is felt, clearance is within limits. If no drag is felt, clearance is excessive. If crankshaft cannot be rotated, clearance is not enough.

3) Using Plastigage method, insert a .001" to .003" (Green) piece of plastigage between bearing and connecting rod journal. Install bearing cap and tighten to correct torque specification.

4) Remove bearing cap and compare width of plastigage with scale on package. If plastigage width is within specifications, move on to next rod bearing. If it is not within specifications, the correct undersized bearings will have to be fitted.

5) New bearings are available in standard, .001", .002", .003", .010" and .012" undersize. Always install bearings in pairs. Do not use a new bearing with an old bearing. Install connecting rod bearings so formed tang fits into machined groove in connecting rod. Install rod caps and tighten nuts.

Main Bearings – 1) Using either Shim Stock method or Plastigage method, check main bearing clearances one at a time while all other main bearing caps are tight. New bearings are available in standard, .001", .002", .003", .010" and .012" undersize. A new .001" bearing half may be used in combination with a new standard bearing half or a .002" with a .001". **NOTE** – Always use smaller diameter bearing half as upper.

2) If bearing clearances are not within limits, remove bearing cap, insert suitable tool (C-3509) in oil hole journal and rotate crankshaft clockwise to remove upper bearing half. To install new upper bearing, slightly chamfer sharp edges from plain side and start bearing in place.

3) Insert tool and slowly rotate crankshaft counterclockwise, sliding bearing in place. Install main bearing cap with new bearing installed and tighten. **NOTE** – Upper main bearings are grooved and lower main bearings are plain. Bearing halves are not interchangeable.

4) Check crankshaft end play and if it is not within the correct specifications, change number three main bearing. This bearing carries thrust load. Recheck crankshaft end play.

318", 360", 400" & 440" V8 (Cont.)

REAR MAIN BEARING OIL SEAL

Removal — With oil pan removed, remove rear seal retainer and rear main bearing cap. Remove upper seal by turning suitable tool (C-4148) into end of seal and pulling seal out with tool, (do not mar crankshaft). Remove lower seal by carefully prying from the side with small screwdriver.

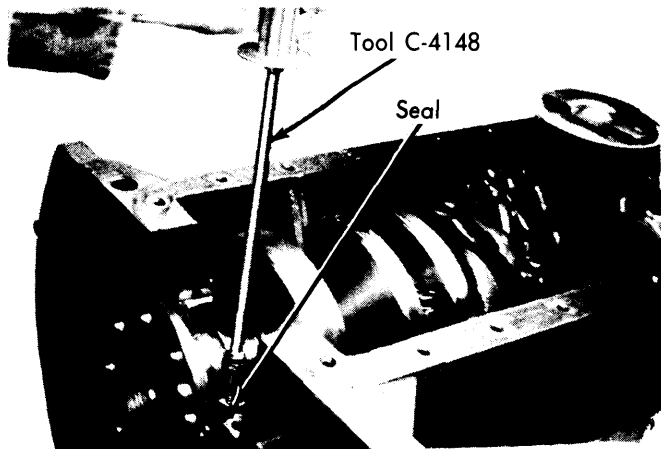


Fig. 10 Using Tool C-4148 to Remove Upper Rear Main Oil Seal

Installation — 1) Split type rubber seals may be replaced without removing the crankshaft and must be installed as a pair. Oil upper seal lip lightly with engine oil. Hold seal (with paint stripe to rear) tightly against crankshaft with a thumb and rotate crankshaft while sliding seal into groove.

CAUTION — Sharp edge of groove in block may shave or nick back of seal. Care must be exercised not to damage sealing lip.

2) Install lower half of seal into lower seal retainer with paint stripe to rear. Install main bearing cap and tighten.

NOTE — On 400" and 440" engines, perform the following operations as rapidly as possible when installing side seals. Side seals are made of a material that expands quickly when oiled. Failure to pre-oil seals will result in an oil leak.

3) Apply mineral spirits or diesel fuel to the side seals. Install seals immediately in seal retainer grooves. Install seal retainer in block and tighten screws.

CAMSHAFT

ENGINE FRONT COVER

Removal — 1) Drain cooling system and remove radiator and water pump assembly. On 318" and 360" engines, also remove power steering pump, if equipped. Remove vibration damper bolt and using suitable tool (C-3688) pull damper assembly from end of crankshaft.

2) On 318" and 360" engines, remove fuel lines, fuel pump, loosen oil pan bolts and remove front bolt at each side. Then on all engines, remove cover bolts and cover. **NOTE** — Use extreme caution to avoid damaging oil pan gasket on 318" and 360" engines.

Installation — Check that mating surfaces of chain case cover and cylinder block are clean and free from burrs. Install cover with new gasket and tighten bolts. Tighten oil pan bolts and install fuel pump, lines and power steering pump on 318" and 360" engines. On all engines, install vibration damper, water pump assembly and radiator. Fill cooling system.

FRONT COVER OIL SEAL

NOTE — 318" and 360" engines use an externally mounted oil seal.

Removal — Remove belts, radiator shroud, pulley and vibration damper. Use suitable tool to pry out old seal. Be careful not to damage crankshaft seal surface or cover.

Installation — 1) Insert threaded shaft (part of tool C-4251) into threads of crankshaft. Place seal with spring toward inside of engine. Place installation adaptor with thrust bearing and nut on shaft.

2) Tighten nut until tool is flush with cover. Reinstall vibration damper, pulley, radiator shroud, and belts. Torque as necessary.

NOTE — 400" and 440" engines must have front cover removed to replace oil seal.

Removal — With front cover removed, use a drift and hammer to tap lightly around seal case to form oil seal case inward. Grasp seal case with vise grips; twist and pull at several positions on seal case to remove seal.

Installation — Using suitable tool (C-3506) insert installing screw through the installing plate. Insert screw with plate through seal opening (with inside of cover facing up) and place seal in position with seal lips down. Place seal installing plate into seal with protective recess toward lip of seal retainer. Install flat washer and nut on installing screw. Hold screw and tighten nut. Seal is properly installed when seal case is tight against face of cover. If a .0015" feeler gauge cannot be inserted between neoprene and cover, seal is properly installed.

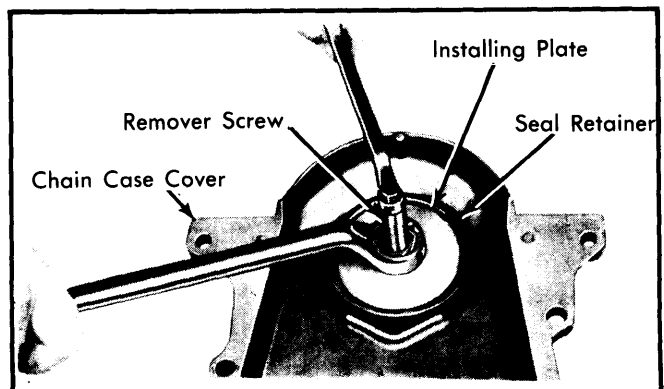


Fig. 11 Using Tool C-3506 to Install Front Cover Oil Seal on 400" and 440" Engines (Note Cover is Removed)

TIMING CHAIN

Removal — With front cover removed, remove camshaft sprocket attaching bolt, washer and fuel pump eccentric (318" and 360" engines only). Remove timing chain with crankshaft and camshaft sprockets.

Installation — When installing timing chain, use a suitable tool (C-3509) to prevent camshaft from contacting welch plug in rear of engine block. Remove distributor and oil pump-distributor drive gear. Locate tool against rear side of cam gear and attach tool with distributor retainer plate bolt. Then proceed as follows:

318", 360", 400" & 440" V8 (Cont.)

1) Place camshaft and crankshaft sprockets on bench with timing marks on imaginary centerline through bore of both sprockets. Place timing chain around both sprockets. Turn crankshaft and camshaft to line up with keyway location in crankshaft sprocket and camshaft sprocket (dowel hole in camshaft sprocket on 400" and 440" engines).

2) Slide both sprockets evenly over their respective shafts (with new chain installed on sprockets). Use a straight edge to measure alignment of timing marks. Install washer and camshaft sprocket both and tighten. Check that rear face of aluminum camshaft sprocket is flush with end of camshaft.

CAMSHAFT

NOTE — Whenever a new camshaft is installed, inspect and check, with a straight edge, all tappet faces for "dishing". Replace any tappet with a negative crown.

Removal — With engine removed from vehicle, remove rocker arm and shaft assemblies: push rods and tappets; timing chain and sprockets; distributor with drive shaft. On 318" and 360" engines, remove camshaft thrust plate noting location of oil tab. On 400" and 440" engines, remove fuel pump and allow fuel pump push rod to drop away from cam. Install a long bolt in front of camshaft to facilitate removal and carefully remove camshaft.

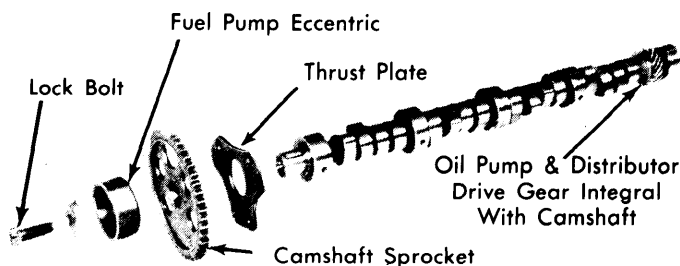


Fig. 12 318" and 360" Camshaft with Related Components

Installation — Lubricate camshaft lobes and bearing journals. Insert camshaft to within 2" of its final position in cylinder block. Install suitable tool (C-3509) in distributor drive hole and hold in position using distributor lock plate screw. **NOTE** — Tool will prevent camshaft from being pushed in too far and knocking out camshaft rear plug. Install camshaft to proper position.

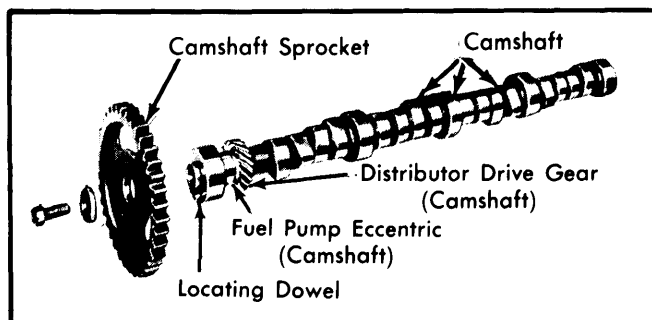


Fig. 13 400" and 440" Camshaft Component Identification

CAMSHAFT BEARINGS

Removal — Drive out welch plug at rear of block. With suitable driver-installer tool, use proper adapter on tool and drive out old bearings.

Installation — Using correct size adapter on tool, slide new rear bearing over adapter and carefully drive bearing into place. Install remaining bearings in same manner. Oil holes in new bearings must be aligned with oil passages from main bearings. Bearing oil hole index may be checked by inserting a pencil flashlight in the bearing. If oil holes are not in exact alignment, remove bearing and reinstall correctly. Install new welch plug at rear of cylinder block. **NOTE** — On 400" and 440" engines, install No. 1 bearing $\frac{1}{32}$ " inward from front face of cylinder block.

CAMSHAFT END THRUST

318" & 360" Engines — Taken by thrust plate behind camshaft sprocket. End play is .002-.006" (wear limit .010").

400" & 440" Engines — Taken by rear face of aluminum camshaft sprocket hub, bearing directly on front of cylinder block.

VALVE TIMING

Removal, 318" & 360" Engines — 1) Turn crankshaft clockwise until No. 6 exhaust valve is closed and No. 6 intake valve is opening. Insert $\frac{1}{4}$ " spacer between rocker arm and valve stem of No. 1 intake valve. Spring load will bleed tappet down to effect solid tappet lash.

2) Install dial indicator so plunger contacts valve spring retainer in a perpendicular position. Zero indicator. Turn crankshaft clockwise until valve has lifted .010" for 318" engine, .034" for 360" engine with standard cam or .030" for 360" engine with 4-Bbl. and H.P. cam. **CAUTION** — Do not turn crankshaft any further. Valve spring may bottom and result in damage to rocker arm or push rod.

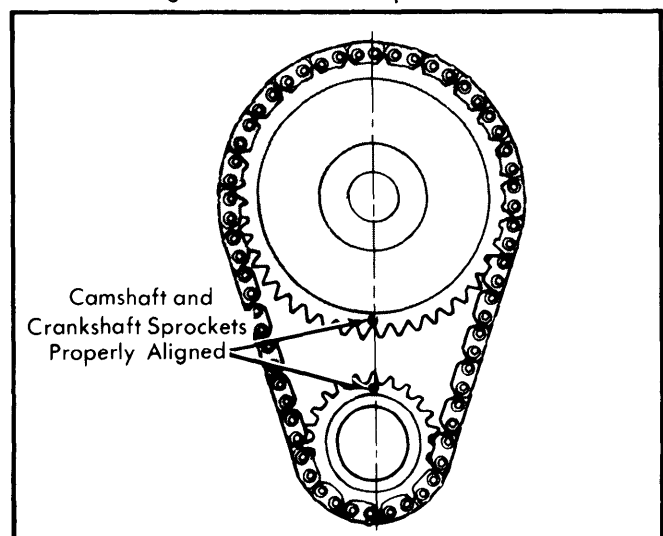


Fig. 14 Camshaft and Crankshaft Timing Chain Sprocket Alignment

3) Timing mark on crankshaft pulley should read from 10° BTDC to 2° ATDC. If reading is not correct, check sprocket index marks, inspect timing chain for wear and check accuracy of DC mark on timing indicator.

318", 360", 400" & 440" V8 (Cont.)

Removal, 400" and 440" Engines - 1) Turn crankshaft clockwise until No. 6 exhaust valve is closed and No. 6 intake valve is opening. Insert 1/4" spacer between rocker arm and valve stem of No. 1 intake valve. Spring load will bleed down to effect solid tappet lash.

2) Install dial indicator so plunger contacts valve spring retainer in a perpendicular position. Zero indicator. Turn crankshaft clockwise until valve has lifted .025" (all engines except 440" H.P.) or .033" (440" H.P.). **CAUTION** - Do not turn crankshaft any further. Valve spring may bottom and result in damage to rocker arm or push rod.

3) Timing mark on crankshaft pulley should read from 10° BTDC to 2° ATDC. If reading is not correct, check DC mark on timing indicator, sprocket index marks, timing chain for wear.

ENGINE OILING

Crankcase Capacity - 4 qts. (except 400" and 440" Hi. Per.), 5 qts. (400" and 440" Hi. Per.). Add 1 qt. with filter change.

Normal Oil Pressure - 30-80 psi at 2000 RPM.

Oil Filter - Change at first oil change and every second oil change after that.

Pressure Regulator Valve - In oil pump. Not adjustable.

OIL PUMP

Disassemble (see illustrations), clean and inspect all parts for proper clearances (see specifications). **NOTE** - Inner rotor and shaft assembly can only be replaced if outer rotor is replaced as units are a matched assembly.

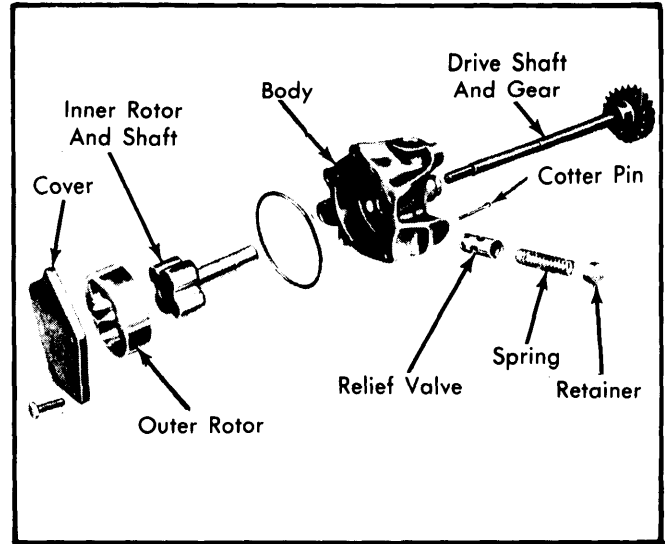


Fig. 15 Exploded View of 318" and 360" Oil Pump

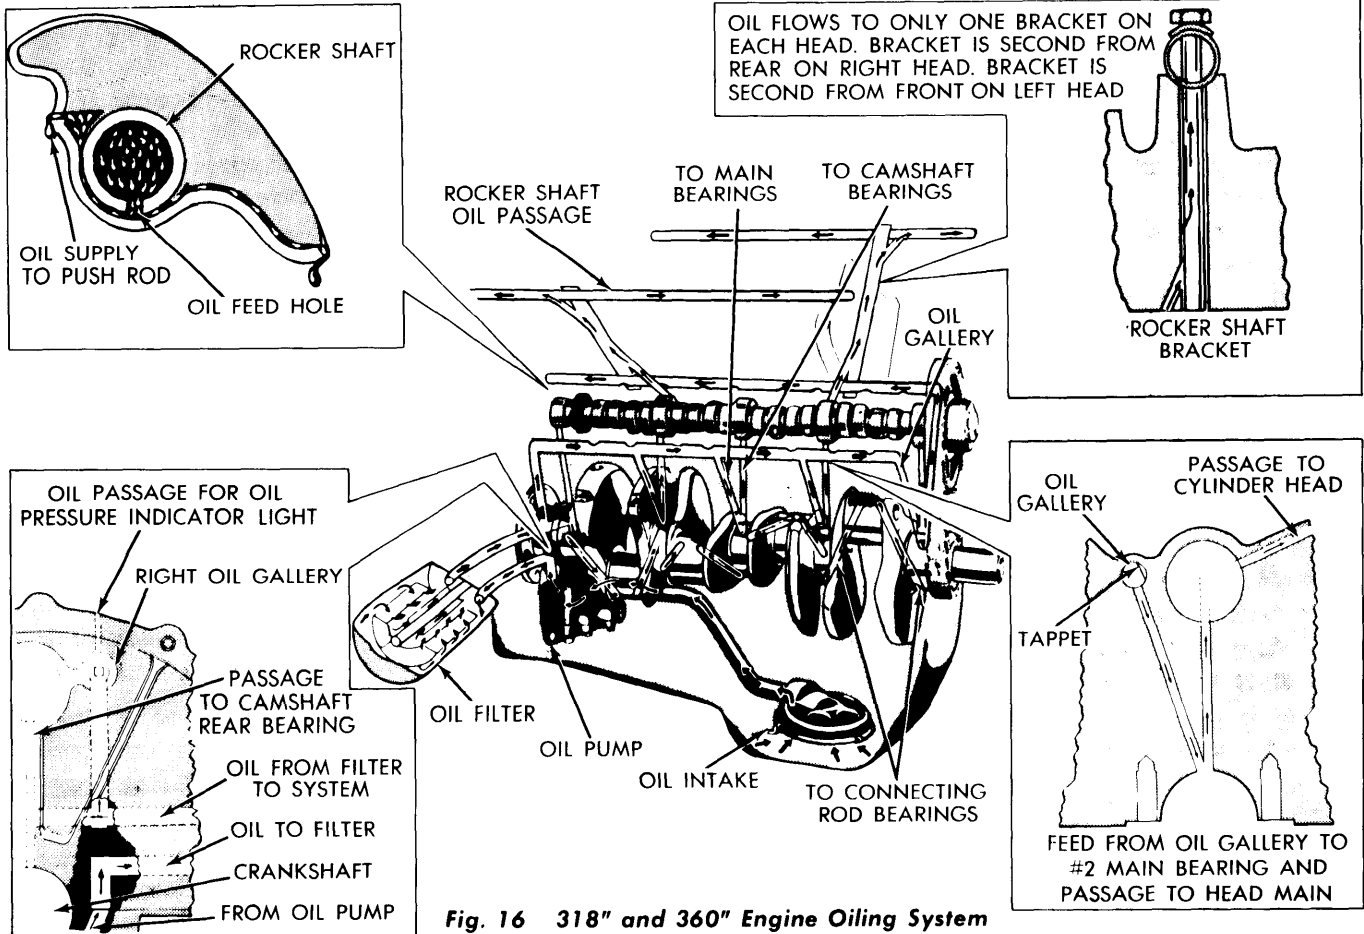


Fig. 16 318" and 360" Engine Oiling System

318", 360", 400" & 440" V8 (Cont.)

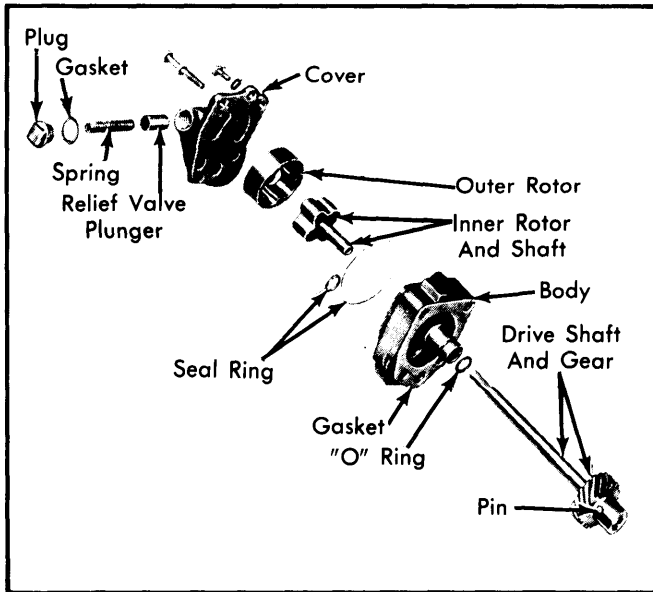


Fig. 17 400" & 440" Engine Oil Pump

Oil Pump Specifications

Application	318", 360"	400", 440"
Oil Pump Cover	.0015" Max.	.0015" Max.
Outer Rotor Length	①.825" Min.	.943" Min.
Outer Rotor Dia.	2.469" Min.	2.469" Min.
Inner Rotor Length	①.825" Min.	.943" Min.
Clearance Over Rotors (Outer)	.004" Max.	.004" Max.
Clearance Over Rotors (Inner)	.004" Max.	.004" Max.
Outer Rotor Clear.	.014" Max.	.014" Max.
Tip Clearance Between Rotors	.010" Max.	.010" Max.

① - .943" Min. on 360" Engine.

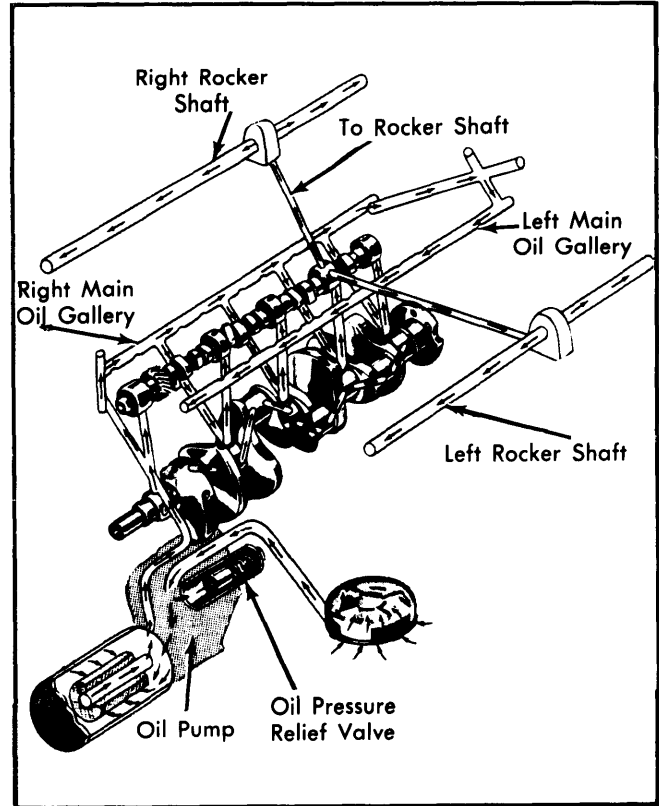


Fig. 18 400" & 440" Engine Oiling System

Pressure Relief Valve Springs

318" & 360" Engines - Spring has free length of $2\frac{1}{32}$ - $2\frac{3}{4}$ ". Spring should test 16.2-17.2 lbs. when compressed to $1\frac{1}{32}$ ".

400" & 440" Engines - Spring has free length of $2\frac{1}{4}$ ". Spring should test 22.3 to 23.3 lbs. when compressed to $1\frac{1}{32}$ ".

ENGINE SPECIFICATIONS

GENERAL SPECIFICATIONS						
Engine	Net HP At RPM	Torque (Ft. Lbs. at RPM)	Compr. Ratio	Bore	Stroke	Displ. Cu. Ins.
318" 2-Bbl.	140@4000	245@1600	8.5-1	3.91"	3.31"	318
318" 4-Bbl.	155@4000	245@1600	8.5-1	3.91"	3.31"	318
360" 2-Bbl.	155@3600	270@2400	8.5-1	4.00"	3.58"	360
360" 4-Bbl.	175@4000	260@2400①	8.0-1	4.00"	3.58"	360
400" 4-Bbl.	190@3600	305@3200	8.2-1	4.34"	3.38"	400
440" 4-Bbl.	195@3600②	320@2000②	8.2-1	4.32"	3.75"	440

① - Calif. H.P. 170@4000 Torque 310@1600

② - Calif. & Hi Alt. 185@3600 Torque 310@2400

Chrysler Corp. V8 Engines

318", 360", 400" & 440" V8 (Cont.)

ENGINE SPECIFICATIONS (Cont.)

VALVES							
Engine & Valve	Head Diam.	Face Angle	Seat Angle	Seat Width	Stem Diameter	Stem Clearance	Valve Lift
318" Int. Exh.	1.78" 1.50"	45° 43°	45° 45°	.065-.085" .040-.060"	.372-.373" .371-.372"	.001-.003" .002-.004"	.373" .400"
360" & 360" H.P. Int. Exh.	1.88" 1.60"	45° 43°	45° 45°	.065-.085" .040-.060"	.372-.373" .371-.372"	.0015-.0035" .0025-.0045"	.410" .410"
400" & 440" Std. Int. Exh.	2.08" 1.74"	45° 45°	45° 45°	.060-.085" .040-.060"	.372-.373" ①	.0011-.0028" ②	.434" .430"
400" & 440" H.P. Int. Exh.	2.08" 1.74"	45° 45°	45° 45°	.060-.085" .040-.060"	.3718-.3725" ③	.0016-.0033" ④	⑤.434" .464"

① — Hot end .3713-.3720"; Cold end .3723-.3730".

② — Hot end .0021-.0038"; Cold end .0011-.0028".

③ — Hot end .3708-.3715"; Cold end .3718-.3725".

④ — Hot end .0026-.0043"; Cold end .0016-.0033".

⑤ — .449" for 440"H.P.

VALVE SPRINGS			
Engine	Free Length	PRESSURE (LBS.)	
		Valve Closed	Valve Open
318"	2.00	78-88@1 $\frac{1}{16}$ "	170-184@1 $\frac{1}{16}$ "
360" & 360"HP	2.10"	108-118@1 $\frac{1}{32}$ "	186-200@1 $\frac{1}{4}$ "
400"	2.58"	121-129@1 $\frac{5}{64}$ "	192-208@1 $\frac{1}{16}$ "
400"HP	2.58"	121-129@1 $\frac{5}{64}$ "	192-298@1 $\frac{1}{16}$ "
440"	2.23"	100-110@1 $\frac{5}{64}$ "	236-256@1 $\frac{23}{64}$ "
440"HP	2.23"	100-110@1 $\frac{5}{64}$ "	236-256@1 $\frac{23}{64}$ "

VALVE TIMING				
Engine	INTAKE		EXHAUST	
	Open (BTDC)	Close (ALDC)	Open (BLDC)	Close (ATDC)
318"	10°	50°	52°	16°
360" & 360" H.P.	18°	54°	57°	15°
400" & 440" Std.	18°	62°	68°	20°
400" H.P.	18°	62°	68°	20°
440" H.P.	21°	67°	79°	25°

PISTONS, PINS, RINGS						
Engine	PISTONS		PINS		RINGS	
	① Clearance	Piston Fit	Rod Fit	Rings	End Gap	Side Clearance
318" & 360"	.0005-.0015	.00025-.00075"	.0007-.0024"②	1&2 3	.010-.020" .015-.055"	.0015-.0030" .0002-.005"
400" & 440"	.0003-.0013"	.00045-.00075"	.0007-.0014"	1&2 3	.013-.023" .015-.062"	.0015-.0030" .0002-.005"

① — Measured from Top of Piston Skirt

② — Interference Fit

Chrysler Corp. V8 Engines

318", 360", 400" & 440" V8 (Cont.) ENGINE SPECIFICATIONS (Cont.)

CRANKSHAFT MAIN & CONNECTING ROD BEARINGS							
Engine	MAIN BEARINGS				CONNECTING ROD BEARINGS		
	Journal Diam.	Clearance	Thrust Bearing	Crankshaft End Play	Journal Diam.	Clearance	Side Play
318"	2.4995-2.5005"	.0005-.0020"	No.3	.002-.009"	2.124-2.125"	.0005-.0025"	.006-.014"①
360"	2.8095-2.8105"	.0005-.0020"	No.3	.002-.009"	2.124-2.125"	.0005-.0025"	.006-.014"①
400"	2.6245-2.6255"	.0005-.0020"	No.3	.002-.009"	2.375-2.376"	.0005-.0025"②	.009-.017"①
440"	2.7495-2.7505"	.0005-.0020"	No.3	.002-.009"	2.375-2.376"	.0005-.0025"②	.009-.017"①

- ① — Total Two Rods.
- ② — Clearance shown is for 4-Bbl. Std. engine. 4-Bbl. H.P. is .0005-.0030".

CAMSHAFT			
Engine	Journal Diam.	Clearance	Lobe Lift
318"			
No.1	1.997-1.999"	.001-.003"
No.2	1.991-1.983"		
No.3	1.996-1.968"		
No.4	1.950-1.952"		
No.5	1.5595-1.5615"		
360"			
No.1	1.998-1.999"	.001-.003"
No.2	1.982-1.983"		
No.3	1.967-1.968"		
No.4	1.951-1.952"		
No.5	1.5605-1.5615"		
400" & 440"			
No.1	1.998-1.999"	.001-.003"
No.2	1.982-1.983"		
No.3	1.967-1.968"		
No.4	1.951-1.952"		
No.5	1.748-1.749"		

TIGHTENING SPECIFICATIONS		
Application	318", 360" Ft. Lbs.	400", 440" Ft. Lbs.
Camshaft Sprocket	50	50
Camshaft Thrust Plate	50	50
Cylinder Head	105	135
Connecting Rod Caps	45	45
Exhaust Manifold	①	30
Flex Plate-to-Converter	23	23
Flywheel-to-Crankshaft	55	55
Intake Manifold	45	45
Main Bearing Cap	85	85
Oil Pan Screw	17	17
Oil Pump Cover	8	10
Oil Pump-to-Mount	30	30
Rocker Arm Bracket Bolt	30	30
Rocker Arm Cover	3	8
Vibration Damper	100	135
Water Pump	30	30

① — Screw 20 Ft. Lbs., Nut 15 Ft. Lbs..