

FORD MOTOR CO. INTEGRAL HOUSING (AXLE CODES WGX & WGY)

Mustang, Capri
Fairmont, Zephyr
Thunderbird, Cougar
Ford, Mercury
Continental
Mark VI

DESCRIPTION

Hypoid design ring and pinion gear is encased in the integral cast iron housing. A one piece differential case contains a conventional two pinion differential assembly. Semi-floating axle shafts are retained by "C" washer locks at splined end of shafts.

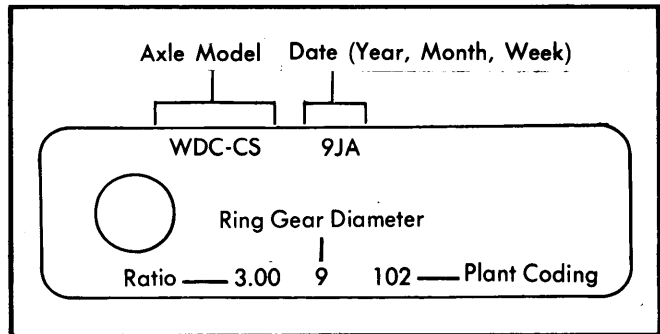


Fig. 1 Rear Axle Identification Tag

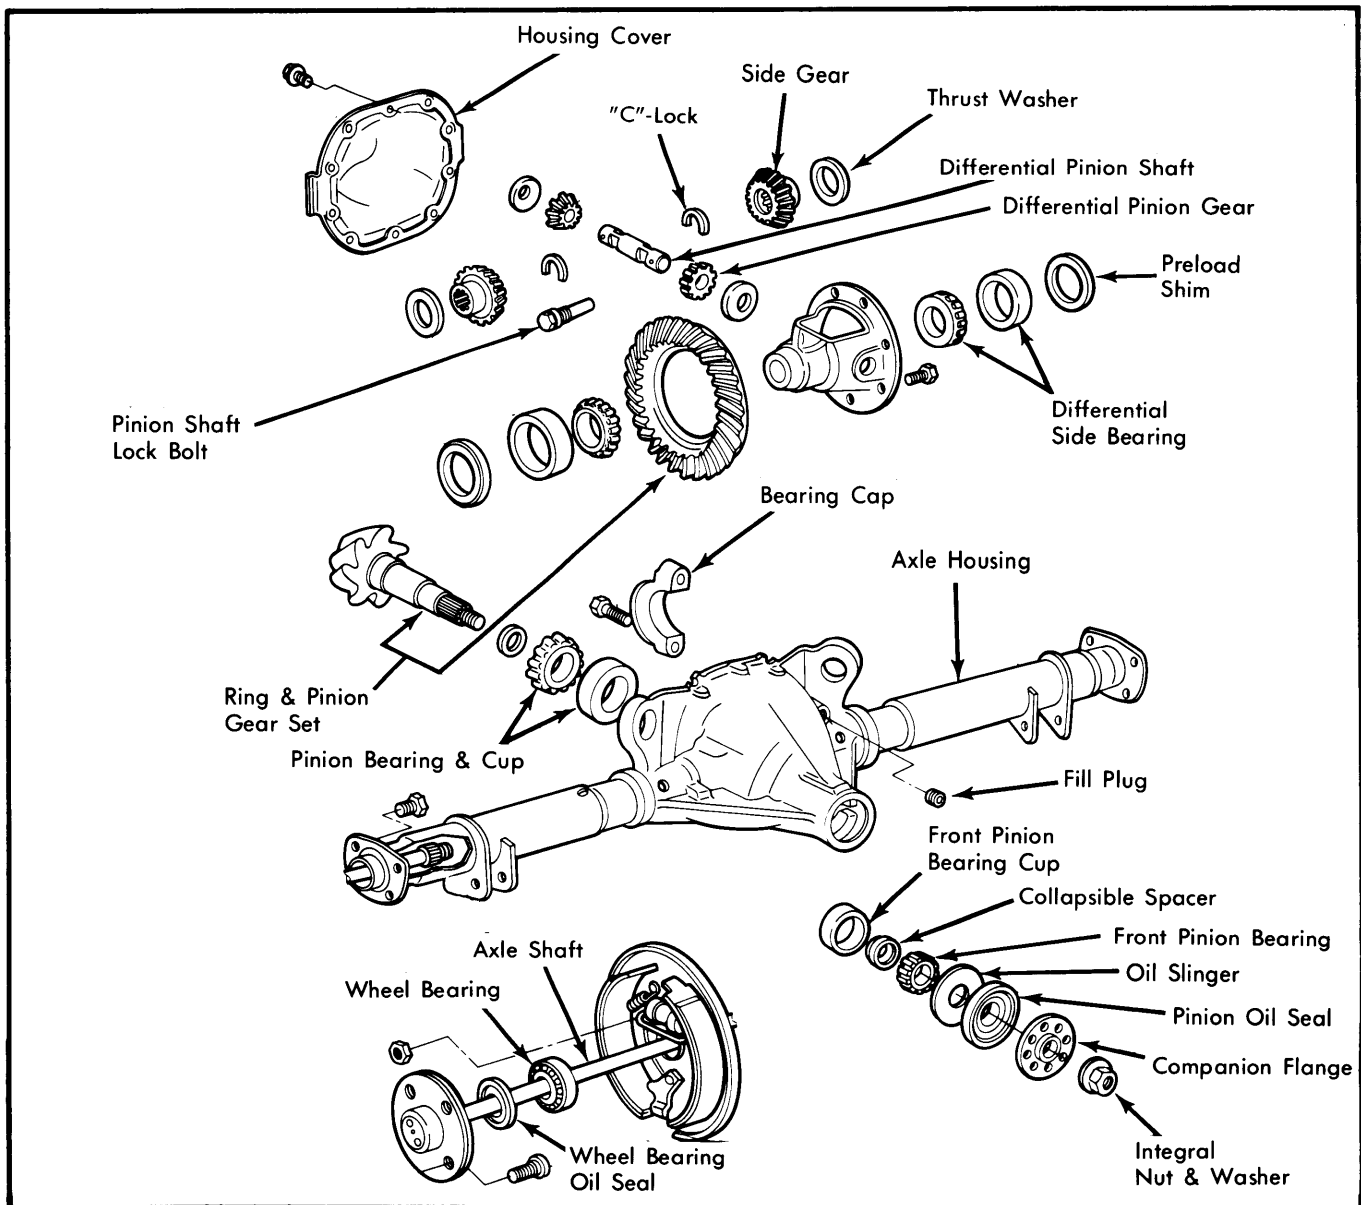


Fig. 2 Ford Motor Co. Integral Carrier Axle
(WGX & WGY Type)

FORD MOTOR CO. INTEGRAL HOUSING (Cont.) (AXLE CODES WGX & WGY)

AXLE RATIO & IDENTIFICATION

A metal tag stamped with Axle Model, Date of manufacture, Ratio, Ring Gear Diameter and Assembly Plant is attached to one of the rear cover attaching bolts.

Axle Ratio Identification

| Application & Axle Ratio | Ring Gear Diameter | Code |
|--|--------------------|-------|
| Mustang, Cougar Fairmont, Zephyr Capri, Thunderbird | | |
| 3.08:1 | 7.5" | WGX-R |
| 2.73:1 | 7.5" | WGX-S |
| 3.45:1 | 7.5" | WGX-T |
| 2.26:1 | 7.5" | WGX-U |
| Ford, Mercury Continental Mark VI | | |
| 2.73:1 | 8.5" | WGY-C |
| 3.08:1 | 8.5" | WGY-A |
| 2.26:1 | 8.5" | WGY-D |

REMOVAL & INSTALLATION

AXLE SHAFTS & BEARINGS

1) Raise vehicle to desired working height and remove wheels and brake drums. Remove housing cover and drain lubricant. Remove lock bolt from carrier and push out differential pinion shaft. Push axle shafts toward center and remove "C" locks. Carefully remove axle.

2) Using suitable puller, remove bearing and seal as a unit.

3) Lubricate bearing with rear axle lubricant and install with suitable tool (T78P-1225-A). Install seal with suitable driver (T78P-1177-A).

NOTE — Proper tools must be used for bearing and seal assembly to avoid cocking and premature failure. If seal becomes cocked during installation, remove it and replace with a new one.

4) Insert axle in housing with care to avoid damage to oil seal. Install "C" locks and push shafts outboard to seat locks in counterbore of differential side gears.

5) Replace pinion gears and washers (if removed) and install pinion shaft and lock bolt. Use silicone sealant applied in a $\frac{1}{8}$ " to $\frac{3}{16}$ " bead on face of carrier casting and install housing cover.

NOTE — No gasket other than the silicone seal is used. Cover assembly must be installed within 15 minutes of application or new sealant must be applied.

REAR AXLE ASSEMBLY

1) Raise vehicle and support under rear frame crossmember. Remove axles as in previous section and remove brake backing plates. Mark and disconnect driveshaft at companion flange.

2) Disconnect vent from axle housing at brake junction block and disengage brake line clips from axle. Disconnect upper arms and shock absorbers from axle housing.

3) Lower housing on jack until coil springs can be removed. Disconnect lower arms from housing and remove housing from vehicle.

4) To install, reverse removal procedure. Note that Loctite, or equivalent, must be used on threads holding axle vent and brake block to axle.

PINION FLANGE & OIL SEAL

NOTE — Although the pinion oil seal and flange replacement involves only removal of pinion shaft nut and flange, this operation disturbs pinion bearing preload and must be carefully reset during assembly.

1) Remove rear wheels and brake drums. Scribe mark on companion flange and drive shaft to insure proper position during assembly and disconnect driveshaft from companion flange. Using an INCH lb. torque wrench, record torque required to rotate pinion through several revolutions.

2) Hold companion flange with suitable tool and remove pinion nut. Mark flange and pinion shaft for reference during reassembly. Remove companion flange and seal with suitable pullers.

3) Install seal using tool (T79P-4676-A or equivalent). Align marks on flange and pinion shaft, then install new integral nut and washer. Hold companion flange and tighten nut gradually, rotating pinion occasionally, until original preload is obtained.

CAUTION — Under no circumstances should pinion nut be backed off to lessen preload. If this is done, a new pinion bearing spacer must be installed and nut tightened until proper preload is obtained.

OVERHAUL

DIFFERENTIAL CASE & DRIVE PINION

Removal — Drain housing and remove cover. Remove axles and mark differential bearing caps for reassembly. Loosen cap bolts and bearing caps until differential case, bearing cups and shims can be pried out of housing, then remove caps and differential assembly from housing.

Disassembly — 1) Remove companion flange and drive pinion out of front bearing cone with a soft faced hammer. If pinion bearing cups are to be replaced, tap alternately on opposite sides of cup using a brass drift.

NOTE — Do not remove cups unless they are damaged.

FORD MOTOR CO. INTEGRAL HOUSING (Cont.) (AXLE CODES WGX & WGY)

2) To remove rear bearing, use suitable press and adapters. Note thickness of shim under rear bearing cone. Remove ring gear bolts and press ring gear from case or tap off with soft faced hammer. Differential bearings may be removed with suitable puller.

NOTE — If new components have been installed, proper gear set assembly must be checked using a Rear Axle Pinion Depth Gauge tool (T79P-4020-A) to determine correct pinion shim. If bearing cups have been replaced, new cone and roller assemblies should also be installed. Cups must be seated in bores so that a .0015" feeler gauge will not fit between cup and bottom of bore. Rear pinion bearing must be pressed on so that it is firmly seated against spacer shim and pinion gear.

Pinion Depth Check — 1) Assemble tool with proper gauge disc (T78P-4020-A, .894" thick) and bearings which will be used in final assembly. Center gauge tube in differential bearing bores and tighten bearing caps (arrows pointing outboard).

2) With tool handle screw tightened to 20 INCH lbs. and gauge block off-set behind center of gauge tube, measure gap between block and tube with feeler gauge.

3) This is the thickness of the shim required under the rear pinion bearing, providing the replacement pinion is not marked with a plus or minus.

4) If pinion has a plus (+) or minus (-) reading shown on it, this amount should be added or subtracted to obtain final shim thickness. Place selected shim on pinion shaft and firmly seat bearing on shaft with press.

Reassembly — 1) Use new attaching bolts with Loctite (or equivalent) and install ring gear to differential case. Press new bearings on case.

2) Lubricate and place front bearing, oil slinger, and pinion oil seal in housing. Place new preload spacer on pinion shaft and insert from rear of carrier. Install companion flange and new integral nut and washer.

3) Hold companion flange and tighten nut gradually, rotating pinion occasionally to seat bearings. Use INCH lb. torque wrench to check bearing preload.

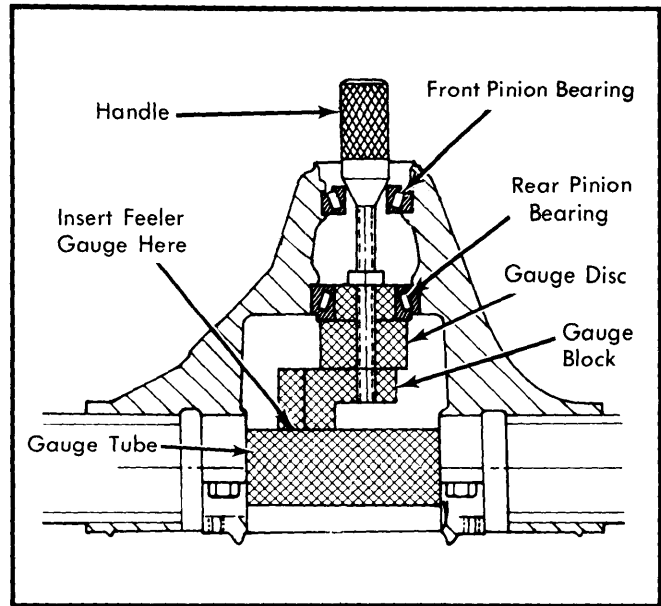


Fig. 5 Using Pinion Depth Gauge Tool

Side Bearing Preload and Backlash — 1) Place differential assembly into carrier bores with a .200" gauge disc spacer on ring gear (left) side between bearing cup and case. Install .300" gauge disc spacer on pinion gear (right) side and tighten bearing caps to 30 INCH lbs.

2) Attach adjuster rod (T78P-4136-A) to left side of axle tube and torque adjusting rod to 40 INCH lbs. while rotating ring several times.

3) Select the thickest feeler gauge that will fit with a slight drag between gauge disc and carrier bore on ring gear (left) side. Add this thickness to .500" and record for TOTAL clearance.

4) Back out adjuster rod to allow .300" (right) gauge disc spacer to be removed after removing right bearing cap. Install bearing preload spacer disc (T78-4136-B3) and tighten cap bolts to 30 INCH lbs.

5) Rock ring gear back and forth while tightening adjuster rod until zero backlash is obtained. Determine gap between gauge disc and LEFT carrier bore with feeler gauge (drag fit).

6) Select the proper left shim thickness by adding feeler gauge reading to .200" and subtracting .008" for preload. See example.

7) Right (pinion gear) side shim thickness may be determined by subtracting thickness of feeler gauge plus .200" found in step 3 from TOTAL clearance in step 2. Add .016" for preload to obtain shim thickness.

NOTE — Differential side shims are available in steps of .002" from .2450" to .3030"+ .0005".

EXAMPLE: Feeler gauge reading of .040" in step 3) added to .500" gives a TOTAL clearance of .540".

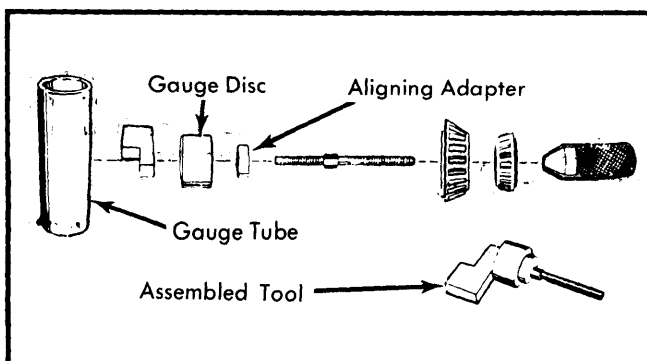


Fig. 4 Rear Axle Pinion Depth Gauge Tool Set

Drive Axles

FORD MOTOR CO. INTEGRAL HOUSING (Cont.) (AXLE CODES WGX & WGY)

| | |
|--|--------------|
| Step 5) Feeler Gauge Reading | .086" |
| Plus Gauge Disc Spacer Thickness | .200" |
| Total | .286" |
| Subtract | .008" |
| CORRECT RING GEAR (Left Side) Shim Size | .278" |

| | |
|---|--------------|
| Total Clearance (Step 3) | .540" |
| Subtract Step 5) Clearance | .286" |
| Remainder | .254" |
| Add (Preload) | .016" |
| CORRECT SHIM SIZE PINION GEAR (Right Side) | .270" |

Installation – 1) Carrier spreader tool (T78P-4000-E) and adapters (T78P-4000-A) are required to install differential assembly and shims.

2) Attach dial indicator and spread housing .016". Do NOT exceed this dimension. Install proper shim as determined in Step 3 on ring gear (left) side and push differential case and cups as far to left as possible.

3) Install right side shim using plastic hammer to tap in until seated. Remove spreader and adapters and install bearing caps with arrows pointed outboard. Marks made during disassembly should be aligned.

4) With a dial indicator, determine backlash and variance around ring gear. Install pinion side gears and thrust washers, axle shafts and "C" locks. Align differential pinion gears and thrust washers and install pinion shaft and lock bolt.

5) Apply a bead of silicone seal and install housing cover. Fill with lubricant as specified. Normal level is 1¼" below filler hole with axle in a normal curb attitude. (Overfilling can result in lubricant leakage at the axle vent.)

ADJUSTMENT SPECIFICATIONS

| Application | Specification |
|--|---------------|
| Ring Gear Backface Runout | .003" |
| Side Gear Thrust Washer Thickness | .030-.032" |
| Pinion Gear Thrust Washer Thickness | .030-.032" |
| Differential Carrier Spread | .016" |
| Nominal Pinion Locating Shim Thickness | .030" |
| Ring Gear to Pinion Backlash | .008-.015" |
| Maximum Backlash Variation | .004" |

TIGHTENING SPECIFICATIONS

| Application | Ft. Lbs. |
|-----------------------------------|----------|
| Bearing Cap Bolts | 70-85 |
| Pinion Shaft Lock Bolt | 15-22 |
| Ring Gear Attaching Bolts | 70-85 |
| Rear Cover Screws | 25-35 |
| Pinion Flange Nut (Minimum) | ⓪140 |

⓪ – Pinion bearing preload 8-14 INCH lbs. for used bearings or 17-27 INCH lbs. for new bearings (oil seal installed). If preload is exceeded before this torque is obtained, a new collapsible spacer must be installed.