

# Windshield Wipers

## CHRYSLER CORP. ELECTRIC 2-SPEED

Dodge  
Plymouth

### DESCRIPTION

Two-speed wiper motors have permanent magnetic fields and are controlled by feeding power to different brushes for low and high speed. For low speed operation, current flows through torque limiting resistor and then to low speed brush. For high speed operation, current is fed directly to high speed brush. Motor speed is selected by rotating switch knob. A circuit breaker protecting wiper system is integral with wiper switch.

### TROUBLE SHOOTING

**Wiper Inoperative** — Binding linkage. Faulty wiper switch. Open or grounded wiring. Faulty motor.

**Motor Draws Excessive Current (Circuit Breaker May Cycle)** — Shorted motor or park switch. Jammed gearbox mechanism. Shorted or burned armature. Defective bearings. Broken brush holder.

**Motor Runs One Speed Only** — Open circuit in red or brown wiring. Defective wiper switch. Low speed torque limiting resistor open.

**Motor Runs But Output Crank Does Not Turn** — Stripped intermediate gear or output gear. Output gear slips on output shaft. Crank arm not fastened properly to output gear shaft.

**Blades Will Not Park** — Motor park switch open. Faulty instrument panel switch. Arm set at incorrect position.

**Motor Does Not Shut Off** — Defective armature brake switch. Broken brush holder. Faulty park mechanism.

### TESTING

#### MOTOR WILL NOT RUN

1) Position panel switch in low-speed position. If motor can be heard running, check motor output shaft. If shaft is not turning, gearbox assembly requires replacement. If the shaft is turning, check drive link to output shaft or linkage for worn parts or disconnected components. If motor cannot be heard running, proceed to step 2) of this procedure.

2) If motor cannot be heard running, connect a voltmeter or test lamp between motor terminal "L" and ground. If 12 volts are present or test lamp lights and switch circuit breaker is not cycling, check for the following conditions: Open ground circuit. Ground strap must make good contact. If motor runs, panel switch is not grounded, switch is faulty or there is an open in wiring. Common brush may not be making good contact with commutator and make require freeing-up or repositioning of spring. Armature may have an open circuit.


3) If reading in step 2) was approximately 12 volts only part of the time due to switch circuit breaker cycling, check for the following conditions: A short in wiring, motor or panel switch or circuit breaker is defective. Remove wiper arms and blades, then connect an ammeter between battery and terminal "L" of motor. If motor runs and ammeter reading is less than 6

amperes, motor is good and problem is in panel switch or wiring. If motor does not run or draws more than 6 amperes, wiper linkage or pivots are binding. Disconnect drive link, reconnect jumper wire and if motor now runs and draws less than 3 amperes, linkage system is in need of repair.

4) If motor does not run or draws more than 3 amperes, motor or gearbox may be jammed internally. Inspect for loose or frozen bearings, jammed gears or a loose bearing retainer. Check armature for burned or blackened windings which may indicate internal shorts.

#### MOTOR RUNS AT LOW SPEED ONLY

Position switch in high position and connect test lamp between terminal "H" and ground. If lamp does not light, an open exists in wiring or switch. If lamp lights, brush is not making contact with armature.

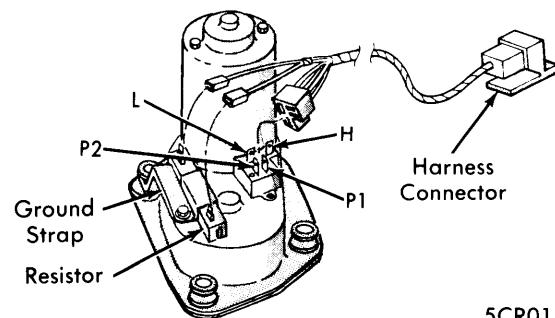

WIPER MOTOR TERMINALS

#### MOTOR RUNS AT HIGH SPEED ONLY

Position switch in low position and connect test lamp between terminal "L" and ground. If lamp does not light, an open exists in wiring, switch or resistor. To check resistor, move test lamp from "L" terminal to terminal on resistor which has brown with yellow tracer wire. If lamp lights, replace resistor. If lamp lights at terminal "L", brush is not making contact with armature.

#### MOTOR CONTINUES TO RUN WITH SWITCH IN OFF OR PARK POSITION

Remove wiring harness and connect a jumper wire from terminal "P2" to terminal "L", then connect a jumper from "P1" to battery. If motor now runs to park position and stops, panel switch is defective. If motor continues to run and does not park, gearbox assembly requires replacement.

#### MOTOR WILL NOT STOP IN PARK POSITION WHEN SWITCH IS IN "OFF" POSITION

Remove wiring connector and clean terminals. If problem continues, place switch in park position and connect a voltmeter or test lamp between terminal "P1" and ground. If voltage is zero or test lamp does not light, problem is in panel switch or wiring. If 12 volts are present or lamp lights, check for voltage at "P2". If voltage is zero or test lamp does not light, motor park switch is defective and gearbox assembly must be replaced. If 12 volts are present or lamp lights, an open exists in panel switch or wiring.

## CHRYSLER CORP. ELECTRIC 2-SPEED (Cont.)

### WIPER SWITCH

Disconnect wiring from switch and remove switch from instrument panel. Use a continuity tester or ohmmeter to check for continuity between contact terminals of switch as shown in table. For test purposes, first position is "OFF", "LOW" is first detent from "OFF" position and "HIGH" is second detent from "OFF" position. Ground is the case of wiper switch.

#### Switch Continuity

OFF	LOW	HIGH
B to B/U .....	B to B/U .....	B to B/U .....
B to P1 .....	B to P1 .....	B to P1 .....
A to P2 .....	B to A .....	B to H .....
H-Open .....	P2-Open .....	P2-Open .....
Remove .....	H-Open .....	A-Open .....

### REMOVAL & INSTALLATION

**"B" & "PB" Models** - Disconnect fusible link from under hood, then disconnect wires from wiper motor. Remove mounting screws and lower motor far enough to gain access to crank arm-to-drive link retainer bushing. Remove crank arm by prying retainer bushing from crank arm pin using a suitable size screwdriver. Remove motor, nut attaching crank arm to motor drive shaft, and crank arm from motor. To install, reverse removal procedure.

**All Other Models** - Disconnect negative battery cable at battery. Disconnect wires from wiper motor and remove mounting screws. Lower motor enough to remove crank arm by pry-

ing retainer bushing from crank arm pin using a suitable size screwdriver. Remove motor, nut attaching crank arm to motor drive shaft, and crank arm from motor. To install, reverse removal procedure.


### OVERHAUL

#### MOTOR

**Disassembly** - Hold wiper motor in a vise and remove housing through bolts. Remove housing and armature assembly. Remove flat washers and spring washer.

**Reassembly** - 1) Install brushes in slots and retain by locking brush lead wire into notches in rear of slots. Install flat washer, spring washer and flat washer on armature shaft. Install armature into bearing while turning shaft counterclockwise to mate shaft gear with intermediate gear. *NOTE* - Spin armature to make sure no binding exists between bearing and shaft.

2) Release brush lead wires from notches and allow brushes to contact commutator. All brush springs must be behind brushes and exert tension on brushes. Align motor housing window with brush holder and install over armature so housing is flush with gear housing and over four detents. *NOTE* - Install housing quickly so magnets in housing do not pull armature out of brush holder. Install through bolts and tighten. Tap assembly gently using a plastic mallet to align bearings in gear housing and motor housing during run period of bench check.

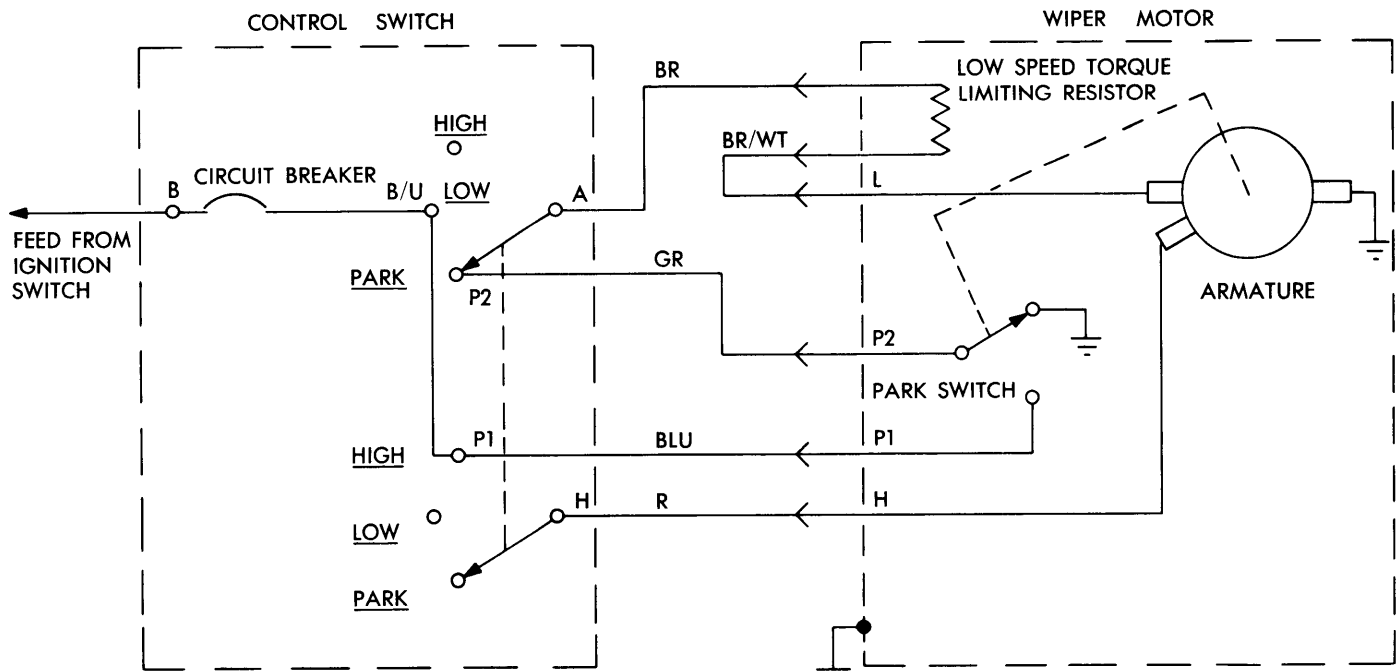

NOTE - CONTROL SWITCH AND PARK SWITCH ARE SHOWN IN THE OFF POSITION

MOTOR MUST BE GROUNDED

### WINDSHIELD WIPERS WIRING DIAGRAM