

1600 & 2000 CC 4 CYLINDER

| GENERAL SPECIFICATIONS | | | | | | | | | | |
|------------------------|----------|------|------------|-----------|--------------------------|--------------|------|----|--------|----|
| Year | Displ. | | Carburetor | HP at RPM | Torque (Ft. Lbs. at RPM) | Compr. Ratio | Bore | | Stroke | |
| | cu. ins. | cc | | | | | in. | mm | in. | mm |
| 1974 | | | | | | | | | | |
| 1600 cc | 97.5 | 1600 | 2-Bbl. | ① 83@5600 | ② 89@3600 | 8.5:1 | 3.03 | 77 | 3.39 | 86 |
| 2000 cc | 121.7 | 2000 | 2-Bbl. | 94@5500 | 108@3600 | 8.5:1 | 3.31 | 84 | 3.54 | 90 |

① - With Auto. Trans.: 81@5600.

② - With Auto. Trans.: 84@3600.

ENGINE IDENTIFICATION

Engine model code number is stamped on the left side of the engine block just below the starter. Engine serial number is stamped on right side of block on a flat just forward of the manifold. Numbers are decoded as follows:

| Application C.I.D. (cc) | Serial Number | Model Code |
|-------------------------|-------------------|------------|
| 97.5 (1600) | 2A00101-2A99999 | 4G32 |
| 121.7 (2000) | 52A00101-52A99999 | 4G52 |

ENGINE REMOVAL

1) Drain cooling system, remove battery, disconnect ground strap, wiring from ignition coil, vacuum control solenoid valve, fuel cut-off solenoid valve, generator, starter, transmission switch, back-up light switch, water temperature gauge and oil pressure switch.

2) Remove air cleaner and disconnect attaching hoses. Disconnect accelerator linkage and heater hoses. Unbolt and separate exhaust pipe from manifold. Disconnect pipe mounting bracket at transmission.

3) Disconnect hose between fuel filter and fuel pump return pipe. On 1600 cc engines, remove radiator and radiator cowl. If equipped with automatic transmission, remove oil cooler pipe.

4) Remove console box, then detach control lever assembly from transmission. Remove hood. Disconnect speedometer cable and back-up light switch wiring from transmission. Disconnect clutch cable from shift lever and then disconnect cable from its bracket (if equipped with manual transmission). Drain transmission. If equipped with transmission dynamic vibration damper, remove damper, remove locking bolts for attaching flange yoke at rear of propeller shaft, then draw shaft out of transmission.


5) Support transmission on a suitable jack and remove front and rear mount bolts. Remove rear engine support bracket. Attach suitable lifting device to front and rear engine hangers. Lift engine-transmission assembly obliquely upward and out of engine compartment. *NOTE - Keep transmission lower than engine when removing.* To install, reverse removal procedure.

CYLINDER HEAD


Removal - 1) Remove rocker arm cover. Turn crankshaft until No. 1 piston is at top of its compression stroke. *NOTE - If dowel pin at forward end of camshaft is at position shown in illustration when crankshaft pulley notch is aligned with timing mark "T" at front of timing chain case, then No. 1 piston is at TDC.*

2) Draw a mating mark in white paint on timing chain in line with mating mark on camshaft sprocket. On 1600 cc engines, chain must be locked in position with the sprocket by twisting a piece of wire tightly around chain and sprocket. Remove camshaft sprocket. Unscrew cylinder head bolts and nuts according to illustrated loosening sequence. *CAUTION - On 1600 cc engines, loosen head bolts in two or three stages in order to prevent head warpage.* Note dowel locator pins when removing head, and take care not to damage pins or twist chain when lifting off head.

Installation - To install, reverse removal procedure, noting the following: Apply sealant to points at which cylinder head gasket will rest over junction of front cover chain case and cylinder block. Tighten cylinder head bolts in sequence shown and in three or four stages. Install camshaft sprocket onto camshaft while pulling upward. If installation is difficult, slacken chain tensioner as required. Turn crankshaft back about 90°. Tighten sprocket lock bolt. Adjust valve clearance.

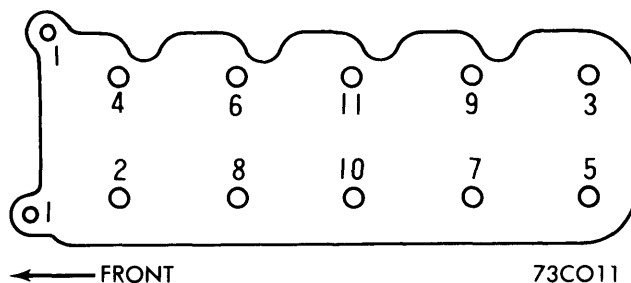

CYLINDER HEAD LOOSENING SEQUENCE

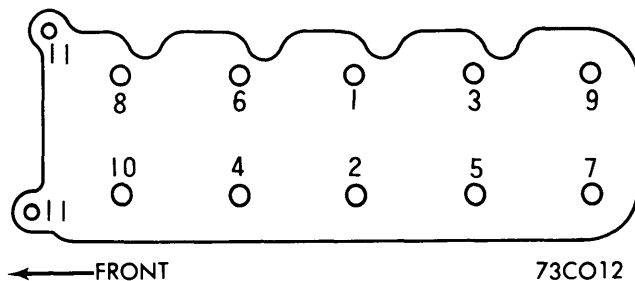

CYLINDER HEAD TIGHTENING SEQUENCE

INTAKE MANIFOLD

1) Drain cooling system, remove air cleaner assembly, water outlet hose, heater hoses, accelerator linkage and choke cable.

2) Disconnect vacuum line, fuel line, water hose on carburetor side and wiring for water temperature gauge. Remove carburetor and then remove intake manifold.

Colt Engines

1600 & 2000 CC 4 CYLINDER (Cont.)

| VALVES | | | | | | | |
|----------------|--------------------------|------------|------------|------------------------|---------------------------|----------------------------|------------------------|
| Engine & Valve | Head Diam. ① In. (mm) | Face Angle | Seat Angle | Seat Width In. (mm) | Stem Diameter In. (mm) | Stem Clearance In. (mm) | Valve Lift In. (mm) |
| 1600 cc Intake | .059 (1.5) | 45° | 45° | .035-.051 (.89-1.3) | .315 (8.0) | .001-.0022 (.025-.056) | |
| Exhaust | .059 (1.5) | 45° | 45° | .035-.051 (.89-1.3) | .315 (8.0) | .002-.0033 (.051-.084) | |
| 2000 cc Intake | .0472 (1.2) | 45° | 45° | .035-.051 (.89-1.3) | .315 (8.0) | .001-.0022 (.025-.056) | |
| Exhaust | .0787 (2.0) | 45° | 45° | .035-.051 (.89-1.3) | .315 (8.0) | .002-.0033 (.051-.084) | |


① — Values given are head thicknesses.

VALVE ARRANGEMENT

Intake — Left side.
Exhaust — Right side.


ROCKER ARM & CAMSHAFT ASSEMBLY

Removal — Remove camshaft bearing cap nuts. Holding assembly by front and rear caps, lift rocker arm shaft off head. Disassemble individual components, keeping rocker arms and corresponding components in proper sequence for reassembly. Remove camshaft from cylinder head.

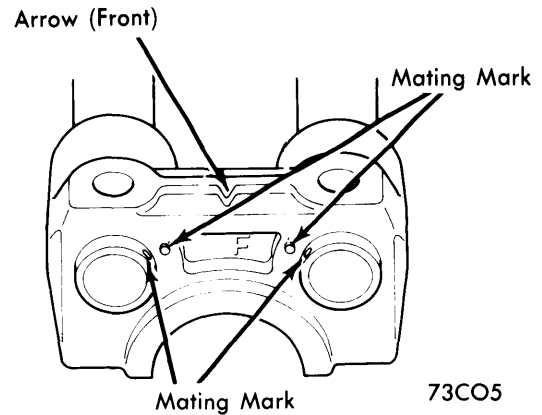


ROCKER SHAFT MATING MARKS

2) Install assembled rocker arm shaft assemblies to cylinder head. Be sure camshaft is installed on 1600 cc engines such that the dowel pin on front end is 42° (Man. Trans.) or 47° (Auto. Trans.) up from horizontal plane, and that dowel pin is directly on top of camshaft on 2000 cc applications. Tighten caps in following order: 3, 2, 4, front, and rear. **NOTE** — No. 4 and front caps are to be tightened together with the rocker arm cover stay.

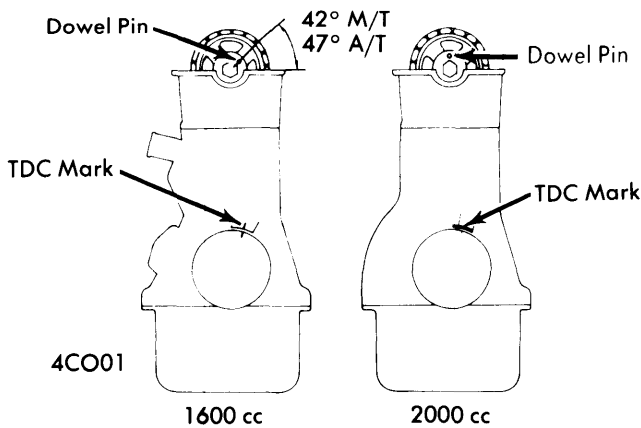


SETTING NO. 1 PISTON AT TDC

Installation — 1) Intall camshaft on head after completing servicing described within this article. See *Camshaft*. Install caps, rocker arms, springs, and wave washers onto both rocker arm shafts. **NOTE** — The front bearing cap has embossed mating mark on front side, which should be aligned with indent marks on front end of rocker arm shafts. Each cap also has arrow which marks direction of installation (front). Ensure all parts are returned to their original positions. Right side rocker arm shaft has eight oil holes and left side has four holes.

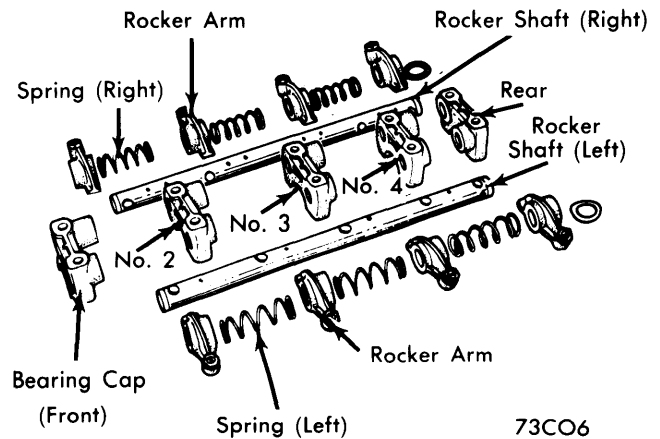

1600 CC ROCKER ARM & SHAFT COMPONENTS

1600 & 2000 CC 4 CYLINDER (Cont.)

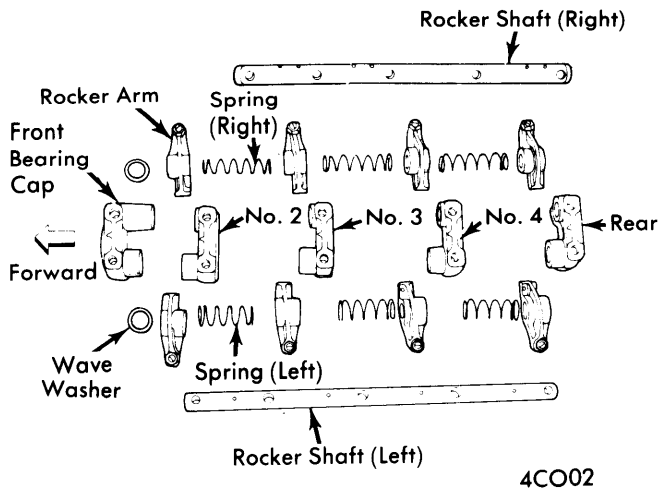


2000 CC ROCKER ARM & SHAFT COMPONENTS

VALVE GUIDE SERVICING

1) Check valve stem-to-guide clearance, and if clearance exceeds service limits as listed in table, replace valve guide with next oversize component. Guides are available in the following oversizes:

Valve Guide Oversizes

| Size Mark | Guide Size In. (mm) | Cyl. Head Bore In. (mm) |
|-----------|------------------------|------------------------------|
| 5..... | .002 (.051)..... | .5138-.5145 (13.05-13.07) |
| 25..... | .010 (.25)..... | .5216-.5224 (13.25-13.27) |
| 50..... | .020 (.51)..... | .5315-.5323 (13.50-13.52) |

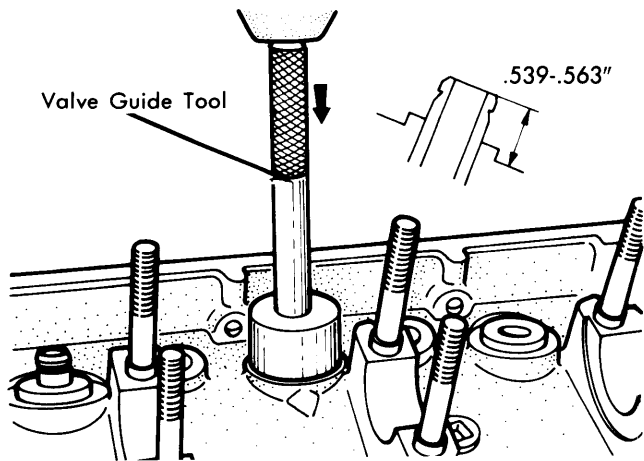

73CO3


VALVE GUIDE INSTALLATION

2) Heat cylinder head to approximately 480°F (249°C), and then use a suitable valve guide tool to drive out each guide toward the combustion chamber. Ream guide bore in cylinder head to specified size (after head has cooled to room temperature).

3) To install new guides, reheat head to same temperature, quickly insert and drive guides into head. Guide should protrude .539-.563" (13.69-14.30 mm) above head surface, as illustrated. Check guide I.D. and ream as necessary.

VALVE STEM OIL SEALS

After installing valve spring seat, place stem seal on valve guide. Using suitable tool (MD998005), lightly hammer seal into proper position (see illustration). When installing, use care not to twist seal. Do not reuse old seals.

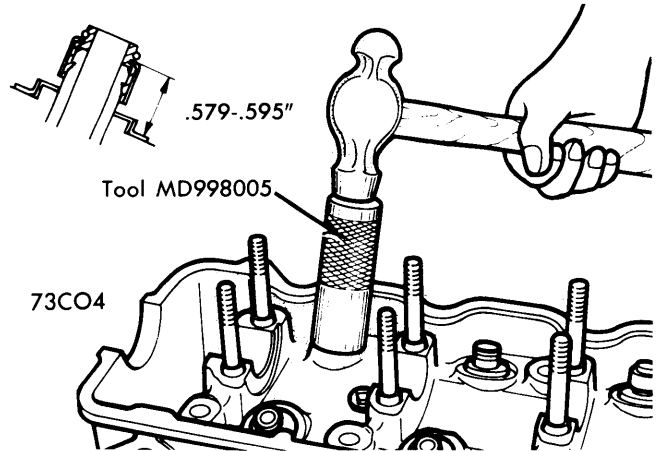

73CO4

VALVE STEM OIL SEAL INSTALLATION

VALVE SEAT SERVICING

1) Check valve seat for damage or wear. Replace or rework seat, as necessary. If reworking seat, check valve guide first. Make proper replacement, if required, then check seat for necessary corrections.

2) Recondition valve seat with suitable grinder or cutter to specified contact width. After rework, valve and seat should be lapped with suitable compound.

3) Check valve seat shrinkage by measuring installed height of spring between spring seat and retainer (with all spring components installed). Maximum allowable spring length for both intake and exhaust valve springs is 1.508" (38.30 mm) for 1600 cc engines and 1.629" (41.38 mm) for 2000 cc engines.

4) Remove valve seat by thinning down with a suitable cutter, then machine seat bore to proper size for replacement seat. Heat head to approximately 480°F (250°C) and press in oversize seat. Replacement seats are available in .012" (.305 mm) and .024" (.610 mm) oversizes, marked "30" and "60" respectively.

Colt Engines

1600 & 2000 CC 4 CYLINDER Cont.)

| VALVE SPRINGS | | | |
|---------------|----------------------|-------------------------------|------------|
| Engine | Free Length In. (mm) | PRESSURE Lbs. @ In. (kg @ mm) | |
| | | Valve Closed | Valve Open |
| 1600 cc | 1.823 (46.3) | 61.7@1.469 (27.99@37.31) | |
| 2000 cc | 1.841 (46.76) | 62.6@1.59 (28.39@40.39) | |

2) Measure installed height of spring between spring seat and retainer, with spring seat, retainer and retainer lock installed.

VALVE CLEARANCE ADJUSTMENT

1) Ensure timing marks on camshaft sprocket and chain are aligned. With head assembly installed, temporarily adjust valves (sequence for adjustment; 1-3-4-2), according to following procedure: At compression stroke TDC, for cylinder being adjusted, loosen rocker arm nuts, then, turning adjusting screw, adjust valve clearance to specifications.

2) After completion of engine assembly, run engine until coolant temperature is 176°F, then readjust valves.

NOTE — Torque head bolts, with engine warm, prior to final valve clearance adjustment; otherwise, clearance will change if head bolts are torqued last.

VALVE SPRING

1) With camshaft removed, install spring compressor, remove retainer lock, retainer and spring. Keep components in proper order for reassembly.

2) Install valve spring with enamel identification mark toward rocker arm. Compress spring, making sure spring compressor does not interfere with stem seal. Install retainer and lock.

VALVE SPRING INSTALLED HEIGHT

1) Check free length and tension of each valve spring. If beyond specifications, replace spring. Using a square, check each spring for proper squareness (1.5° or less). Replace spring if excessively out of square.

Valve Clearance

| Application | Cold | Hot |
|---------------|------------|------------|
| | In. (mm) | In. (mm) |
| Intake | .003 (.08) | .006 (.15) |
| Exhaust | .007 (.18) | .010 (.25) |

| PISTONS, PINS, RINGS | | | | | | |
|----------------------|----------------------------|---------------------|------------------|-------|------------------------|----------------------------|
| Engine | PISTONS | PINS | | RINGS | | |
| | Clearance In. (mm) | Piston Fit In. (mm) | Rod Fit In. (mm) | Rings | End Gap In. (mm) | Side Clearance In. (mm) |
| 1600 cc | .0008-.0016 (.020-.041) | ⊙ | Press Fit | No. 1 | .006-.014 (.15-.36) | .0012-.0028 (.031-.711) |
| | | | | No. 2 | .006-.014 (.15-.36) | .0008-.0024 (.020-.061) |
| | | | | Oil | .006-.014 (.15-.36) | .0010-.0030 (.025-.076) |
| 2000 cc | .0008-.0016 (.020-.041) | ⊙ | Press Fit | No. 1 | .012-.020 (.31-.51) | .0012-.0028 (.031-.711) |
| | | | | No. 2 | .010-.018 (.25-.46) | .0008-.0024 (.020-.061) |
| | | | | Oil | .010-.018 (.25-.46) | .0008-.0026 (.020-.066) |

⊙ — Thumb press fit without rod installed.

PISTON & ROD ASSEMBLY

Removal — Remove connecting rod caps and push piston and rod assembly out top of cylinder. Use care not to damage bearing inserts. Retain assemblies in proper cylinder order.

Installation — 1) Install piston on connecting rod with arrow (front) on piston and embossed number on connecting

rod on the same side. Position ring end gaps 120° apart with no gaps inline with piston pin or thrust face.

2) Slide short pieces of vinyl tubing on rod bolts to prevent damage to bearing journals. Using a ring compressor, install piston and rod assemblies in their proper bore with arrow facing forward.

1600 & 2000 CC 4 CYLINDER (Cont.)

FITTING PISTONS

1) After checking block for distortion (not to exceed .002" or .05 mm), cracks, scratches, or other abnormalities, measure bores at three levels. If any bore distortion exceeds .008" (.20 mm) from standard bore size of 3.0276" (76.90 mm) for 1600 cc engines or 3.3071" (84.00 mm) for 2000 cc engines, refinish ALL cylinders and install oversize pistons. The following service replacement pistons are available:

Oversize Pistons

| Application ① | Size Mark ② | Diam. In. (mm) |
|---------------|-------------|----------------|
| 1600 cc | | |
| .010" O.S. | 0.25 | 3.0374 (77.15) |
| .020" O.S. | 0.50 | 3.0472 (77.40) |
| .030" O.S. | 0.75 | 3.0571 (77.65) |
| .039" O.S. | 1.00 | 3.0669 (77.90) |
| 2000 cc | | |
| .010" O.S. | 0.25 | 3.3163 (84.23) |
| .020" O.S. | 0.50 | 3.3262 (84.49) |
| .030" O.S. | 0.75 | 3.3360 (84.73) |
| .039" O.S. | 1.00 | 3.3464 (85.00) |

- ① — Indicates amount of oversize.
- ② — Stamp mark on piston indicates metric equivalent of amount of oversize.

2) Check outside diameter of piston by measuring at a point .079" (2 mm) from bottom of skirt and at 90° to pin bore. Determine amount of cylinder reboring required to meet specified clearance.

3) To prevent distortion due to the high temperature of the cutting process, this operation should be done in stages and in sequence of 2-4-1-3 or 3-1-4-2. Hone bore to finish size, using a honing angle of 30-45°. Ensure piston-to-cylinder clearance is within specification.


PISTON RINGS

Measure piston ring side and end clearance for all pistons and replace rings as necessary. When replacing a ring without correcting the cylinder bore, check ring end gap at lower part of

cylinder that is less worn. When replacing a ring, be sure to use one of the same size. Install rings on piston with end gaps staggered at 120° intervals, but make sure no ring gap is in line with thrust face of pin bore. Also be sure the manufacturer's marks are facing upward when rings are installed. **NOTE** — On 2000 cc engines, ensure oil ring end gap is opposite the expander joint. The following ring sizes are available:

Piston Ring Sizes

| Ring Size | Size Mark |
|---------------------|-----------|
| Standard | No Mark |
| .010" (.25 mm) O.S. | 25 |
| .020" (.50 mm) O.S. | 50 |
| .030" (.75 mm) O.S. | 75 |
| .039" (1.0 mm) O.S. | 100 |

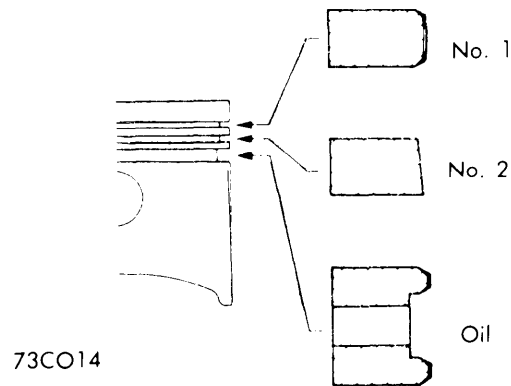

RING INSTALLATION ORDER

PISTON PINS

Check piston pin-to-bore fit; pin should press in smoothly by hand (at room temperature). When assembling, apply engine oil to outside of pin and to piston pin bore, position rod to piston ("FRONT" mark upward), align pin with pressing tool, and press pin into piston and rod.

CRANKSHAFT MAIN & CONNECTING ROD BEARINGS

| Engine | MAIN BEARINGS | | | | CONNECTING ROD BEARINGS | | |
|---------|------------------------|------------------------------|----------------|------------------------------|-------------------------|----------------------------|-----------------------|
| | Journal Diam. In. (mm) | Clearance In. (mm) | Thrust Bearing | Crankshaft End Play In. (mm) | Journal Diam. In. (mm) | Clearance In. (mm) | Side Play In. (mm) |
| 1600 cc | 2.244 (57) | .0006-.0031 (.015-.079) | No. 3 | .002-.007 (.05-.18) | 1.7717 (45) | .0004-.0028 (.010-.071) | .004-.01 (.10-.25) |
| 2000 cc | 2.598 (66) | ① .0008-.0028 (.020-.071) | No. 3 | .002-.007 (.05-.18) | 2.0886 (53.05) | .0006-.0025 (.015-.064) | .004-.01 (.10-.25) |

① — Clearance on center journal is .0010-.0030" (.025-.076 mm).

MAIN & CONNECTING ROD BEARINGS

1) Inspect each bearing for peeling, melting, seizure or improper contact. Replace defective bearings. Measure outside diameter of crankshaft and connecting rod journals to determine if out-of-round or tapered.

2) Cut Plastigage to same length as width of bearing. Place it parallel with journal (not over oil holes). Install crankshaft bearings and caps, tightening to specifications. Always install caps with arrow facing forward.

NOTE — Do not turn crankshaft with Plastigage installed.

1600 & 2000 CC 4 CYLINDER (Cont.)

3) Remove rod assembly from crankshaft and measure Plastigage at widest part (using scale on Plastigage package). Repeat procedure for connecting rod bearings. If clearance exceeds limits, bearing should be replaced or undersize bearing installed. Undersize bearings are available in .010" (.25 mm), .020" (.50 mm), and .030" (.75 mm) undersizes.

THRUST BEARING

With crankshaft bearing caps installed, check thrust clearance (end play) by inserting feeler gauge between center main bearing and crankshaft thrust face. If clearance exceeds specified limits, replace center main bearing.


| CAMSHAFT | | | |
|----------|---------------------------|-------------------------|-----------------------|
| Engine | Journal Diam. In. (mm) | Clearance In. (mm) | Lobe Lift In. (mm) |
| 1600 cc | 1.339 (34) | .002-.0035 (.05-.09) | |
| 2000 cc | 1.339 (34) | .002-.0035 (.05-.09) | |

TIMING CHAIN

1) Rotate crankshaft until No. 1 cylinder is at TDC. If engine has been removed and disassembled, invert block and install timing chain guide, sprocket holder (2000 cc only), and tensioner. On 1600 cc engines, be sure chain guide is such that oil jet is directed toward chain and sprocket meshing point.

2) With mating mark (punch marks) of crankshaft sprocket and camshaft sprocket aligned with chrome-plated chain links, install proper sprocket on crankshaft with chain fitted in guide groove and against tensioner lever.

3) Position the key and then install crankshaft gear and oil slinger. *NOTE* — Crankshaft gear must be installed with letter mark facing forward, and the slinger installed with its concave side facing forward.

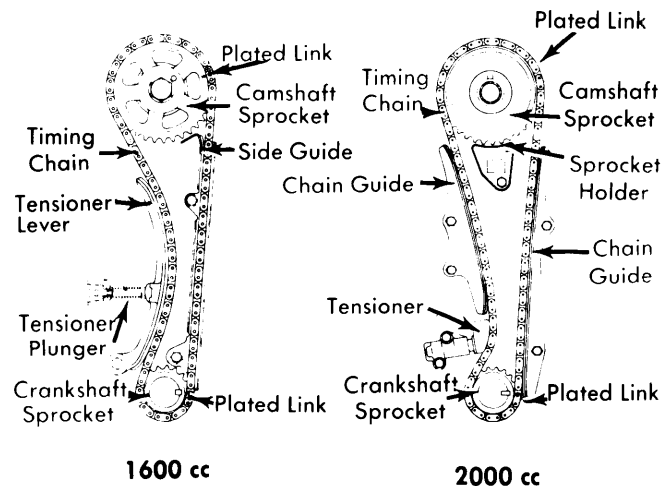

TIMING CHAIN ASSEMBLY

4) Install timing cover gasket and cover to block. On 1600 cc engine, insert tensioner lever plunger and spring through hole in right side of cover, then tighten holder. *NOTE* — Also see *Cylinder Head* for further instruction on alignment of camshaft sprockets.


CAMSHAFT

1) With camshaft removed from vehicle, first visually check camshaft for any obvious defects. Attach a dial gauge to No. 2 or No. 3 journal, turn camshaft one complete revolution and read the total gauge measurement. Divide this amount in half to determine amount of camshaft bend. Maximum allowable bend is .0008" (.020 mm).

2) Next check camshaft end play by measuring with a feeler gauge (camshaft installed) between front bearing cap and camshaft end piece. Play should be .002-.006" (.051-.152 mm) on 1600 cc engines and .0039-.0079" (.10-.20 mm) on 2000 cc engines.

3) Check cam lobes and profile for damage. If lobe height is less than specified, replace camshaft. Wear limit is .020" (.51 mm) less than measurement given in table.

4) Check each camshaft bearing cap for damage. If inner surface is excessively damaged, replace head assembly. Measure each cap I.D. with a dial gauge after installing cap to its appropriate bearing half. Measure camshaft journal diameters, then use these two measurements to determine if camshaft clearance (see table) is within specifications.

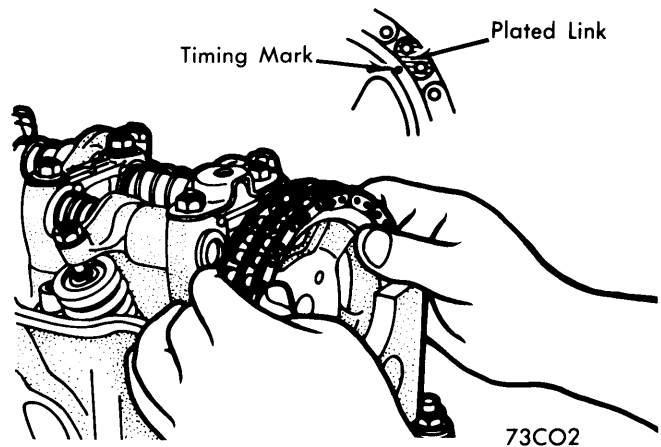

CAMSHAFT TIMING MARKS

| Engine | VALVE TIMING | | | |
|--------------|----------------|-----------------|----------------|-----------------|
| | INTAKE | | EXHAUST | |
| | Open (BTDC) | Close (ALDC) | Open (BLDC) | Close (ATDC) |
| 1600 cc | | | | |
| Man. Trans. | 32° | 60° | 63° | 29° |
| Auto. Trans. | 22° | 70° | 53° | 39° |
| 2000 cc | | | | |
| Auto. Trans. | 25° | 55° | 62° | 14° |

1600 & 2000 CC 4 CYLINDER (Cont.)

ENGINE OILING

Crankcase Capacity — 1600 cc: 4.2 qts. (3.97 liters)
2000 cc: 5.0 qts. (4.7 liters)

Oil Pressure Switch Operating Pressure — 2.8-5.7 psi
(20-40 kg/cm²)

Normal Oil Pressure — 14.2 psi (99.8 kg/cm²), minimum, at idle.

Oil Pump Pressure Relief Valve Opens — 56.9-71.1 psi
(400-500 kg/cm²) at 2,000 RPM.

Oil Filter — Full-flow, cartridge type.

ENGINE OILING SYSTEM

Lubrication system is force-feed type, using trochoid gear pump with full-flow filter. Oil pump is driven by pawl located at top end of distributor shaft, which is rotated by crankshaft gear.


OIL PUMP

Removal (1600 cc Engines) — Remove splash shield from under body. Unscrew oil filter. Remove oil pump cover bolts (timing chain cover) and then remove rotor assembly with cover.

Removal (2000 cc Engines) — Drain engine oil. Remove oil pan and gasket (discard gasket). Remove oil pump assembly retaining bolts and withdraw pump assembly.

Inspection (All Engines) — Check claw of pump shaft for excessive wear and damage to exterior (1600 cc). Check inner and outer rotors for visible damage. Measure inner-to-outer rotor clearance. If in excess of specification, replace rotor assembly. Check rotor-to-cover end play. Replace rotor assembly or cover if beyond specification. On 1600 cc engines, measure clearance between outer rotor and chain case, or on 2000 cc engines, measure clearance between outer rotor and pump body. Inspect oil relief plunger for smooth sliding motion. Examine case oil passageways (1600 cc engines). Replace all necessary components.

Installation (All Engines) — To install, reverse removal procedures and coat mounting surfaces with suitable sealant.

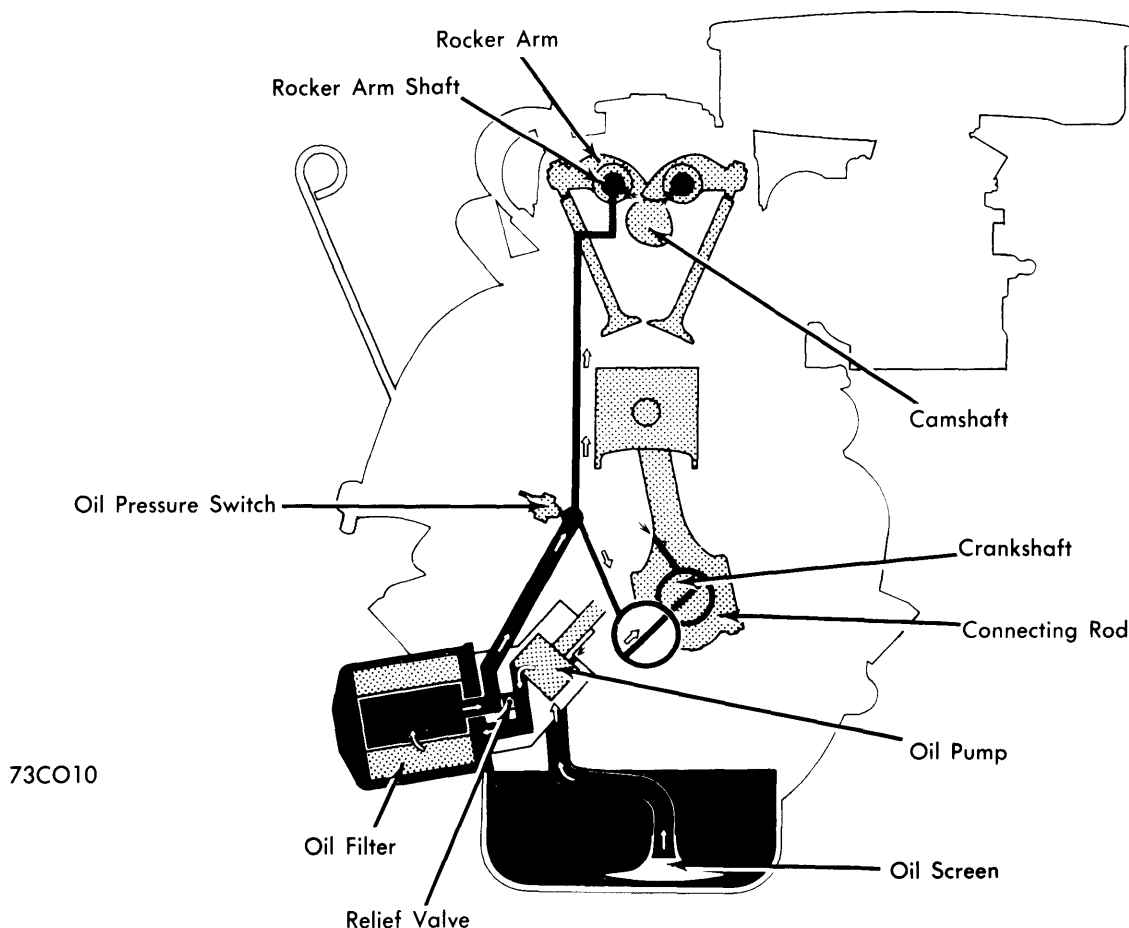

ENGINE OILING SYSTEM (1600 CC)

Colt Engines


1600 & 2000 CC 4 CYLINDER (Cont.)

ENGINE OILING (Cont.)


Oil Pump Specifications

| Application | Clearance In. (mm) |
|---------------------------|-------------------------|
| Chain Case-to-Pump Shaft | |
| 1600 cc | .0008-.0022 (.020-.056) |
| Inner-to-Outer Rotor | |
| All | ⓪ .0047 (.12) |
| Rotor-to-Cover | |
| 1600 cc | .0008-.0039 (.02-.10) |
| 2000 cc | .0008-.0079 (.02-.20) |
| Outer Rotor-to-Chain Case | |
| 1600 cc | .0039-.0063 (.10-.16) |
| Outer Rotor-to-Body | |
| 2000 cc | .0039-.0063 (.10-.16) |


⓪ — Or Less.

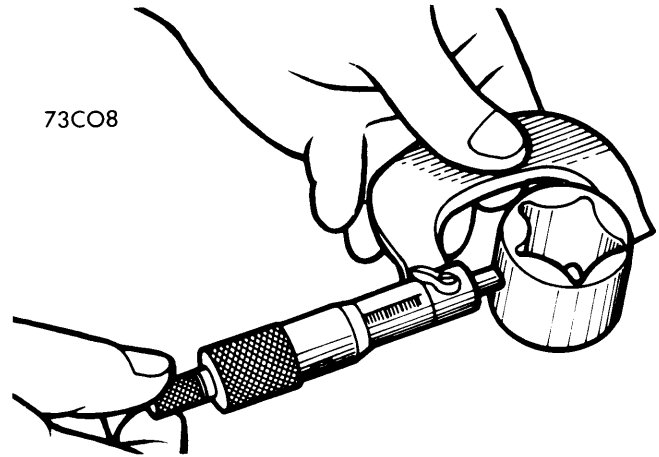

OUTER ROTOR-TO-CHAIN CASE CLEARANCE

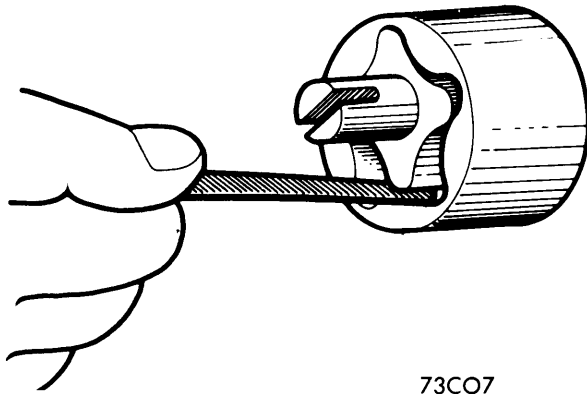

ROTOR-TO-ROTOR CLEARANCE

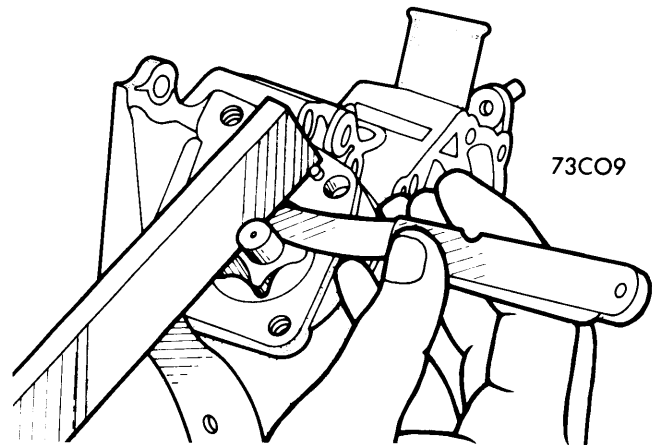

ROTOR END PLAY CLEARANCE

ENGINE COOLING

Thermostat — Opens at 177-183°F (80-84°C).

Radiator Cap — 13 psi (91.4 kg/cm²).

Cooling System Capacity — 1600 cc: 6.4 qts. (6 liters)
2000 cc: 8.0 qts. (7.6 liters)

WATER PUMP

- 1) Drain coolant, loosen alternator, remove fan pulley and fan belt. Remove water pump body from timing cover. Using suitable puller, remove impeller. Drive out seal assembly.
- 2) Heat pump body to approximately 212°F and press shaft assembly out towards pulley. To assemble and install, reverse removal procedure, using new seal and gaskets.

1600 & 2000 CC 4 CYLINDER (Cont.)

ENGINE COOLING (Cont.)

| TIGHTENING SPECIFICATIONS | |
|------------------------------------|-----------------------|
| Application | Ft. Lbs. (mkg) |
| Cylinder Block-to-Engine Bracket | |
| All | 22-29 (3.0-4.0) |
| Engine Support Bracket-to-Body | |
| All | 7.2 (1.0) |
| Intake & Exhaust Manifolds-to-Head | |
| All | 11-14 (1.5-2.0) |
| Cylinder Head Bolts | |
| 1600 cc | |
| Cold | 65-72 (9.0-10.0) |
| Hot | 58-61 (8.0-8.4) |
| 2000 cc | |
| Cold | 65-72 (9.0) |
| Hot | 72-79 (10.0-11.0) |
| Camshaft Bearing Cap | |
| All | 13-14 (1.8-1.9) |
| Camshaft Sprocket | |
| All | 36-43 (5.0-6.0) |
| Main Bearing Cap | |
| 1600 cc | 36-39 (5.0-5.4) |
| 2000 cc | 54-61 (7.5-8.4) |
| Connecting Rod Cap | |
| 1600 cc | 23-25 (3.2-3.5) |
| 2000 cc | 33-35 (4.6-4.8) |
| Flywheel-to-Crankshaft | |
| All | 83-90 (11.5-12.4) |
| Crank Pulley | |
| 1600 cc | 43-50 (6.0-7.0) |
| 2000 cc | 80-93 (11.0-12.9) |
| Oil Pan | |
| All | 4.3-5.8 (.6-.7) |
| Oil Pump Cover | |
| All | 11-14 (1.5-2.0) |