


JAGUAR (Cont.)

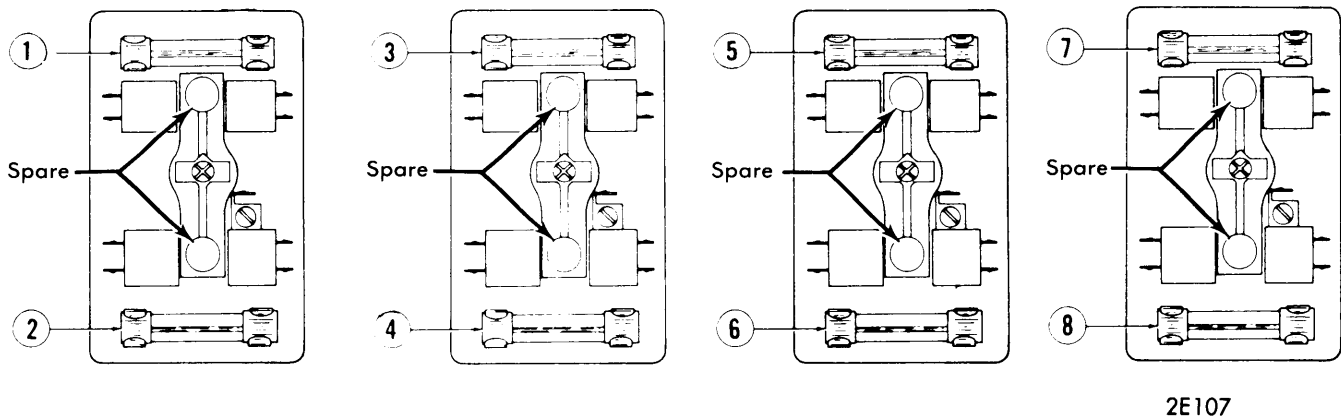

1971-73 JAGUAR "E" TYPE FUSE BLOCK

1971-73 MODELS

- 1 - 35 Amp. Headlight High Beam.
- 2 - 35 Amp. Headlight Low Beam.
- 3 - 35 Amp. Key Warning Buzzer, Interior Lights, Clock, Cigarette Lighter and Headlight Flasher.
- 4 - 35 Amp. Hazard Warning Flasher.

- 5 - 35 Amp. Parking, Panel, License Plate and Auto. Trans. Quadrant Lights.
- 6 - 35 Amp. Stop Lights, Windshield Wipers and Turn Signals.
- 7 - 35 Amp. Horn, Radiator Fan Relay, Windshield Washer, Heater, Back-Up Lights and Gauges.
- 8 - Spare.

JENSEN-HEALEY

FUSE BLOCK

A fuse block containing three 35 Amp. fuses is used. One fuse protects circuits running off of battery. Another protects cir-

cuits which are energized when ignition is ON. The third fuse protects the accessories circuits.

LOTUS

FUSE BLOCK

1973 Models - Fuse block contains four 35 amp. fuses. Circuits protected by each fuse are indicated:

- 1 - Instrument, Parking, Tail, Side Marker and License Plate Lights.

- 2 - Brake Warning Light and Interior Light.
- 3 - Horn, Engine Cooling Fan, Heater and Windshield Wiper.
- 4 - Gauges, Seat Belt Buzzer, Stop Lights, Back-Up Lights, Tachometer, Ignition Light, Hazard Warning Flasher and Turn Signals.

LUV

FUSE BLOCK

1972-73 Models - Fuse block is installed in engine compartment on left inner fender panel near firewall. Fuse block contains 10 fuses with fuse applications listed on cover.

- 9 - Right Low Beam.
- 10 - Left Low Beam.

1972 MODELS

- 1 - Lighting Switch.
- 2 - Lighting Switch.
- 3 - Flasher Unit, Terminal B.
- 4 - Cigar Lighter.
- 5 - Heater Switch and Wiper Motor.
- 6 - Voltage Regulator and Meter, and Back-Up Light Switch.
- 7 - Right High Beam.
- 8 - Left High Beam.

1973 MODELS

- 1 - 15 Amp. Lighting Switch.
- 2 - 15 Amp. Tail and Stop Lights.
- 3 - 15 Amp. Turn Signals.
- 4 - 15 Amp. Interior Lights.
- 5 - 15 Amp. Windshield Wiper and Heater.
- 6 - 15 Amp. Instrument Cluster, Cigarette Lighter, Back-Up Lights, Stop and Tail Light Switches.
- 7 - 10 Amp. Right Hand High Beam.
- 8 - 10 Amp. Left Hand High Beam.
- 9 - 10 Amp. Right Hand Low Beam.
- 10 - 10 Amp. Left Hand Low Beam.